INSTRUCTIONS FOR USE OF LOCKS

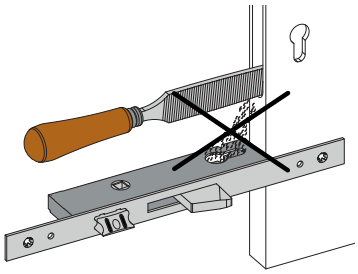

Make sure drillings and filings do not enter in the lock



Use suitable fixing screws



To install the electric locks use transformers 12V-15W



Do not drill through the lock case



Do not use force when installing the spindle



Do not paint the lock



Dead bolt must not protrude when the door is open



Do not operate handle and key simultaneously



Lubricate frequently the locks with graphite or non resinous oil

