

**MATERIALS**

Stainless steel forend and springs
Zinc and plastic plated steel case and cover

**THROW EXCLUSION**

For series:
380 - 780 - 880
390 - 790 - 890 - 990
1380 - 1780



To exclude the second throw, bend the tab with a screwdriver towards the inside of the lock

**EASY TO TURN**

Adjustable anti-noise latch bolt ~ 5 mm
interchangeable with roller bolt and plug:
For series 370 - 770 - 870 - 1770 - 1870:
Roller bolt cod. 0535 - Plug cod. 0371
For series 380 - 780 - 880 - 1380 - 1780:
Roller bolt cod. 0385
For series 390 - 790 - 890 - 990:
Roller bolt cod. 0395

DEAD AND ADJUSTABLE LATCH BOLT

Latch bolt interchangeable with roller bolt cod.0535

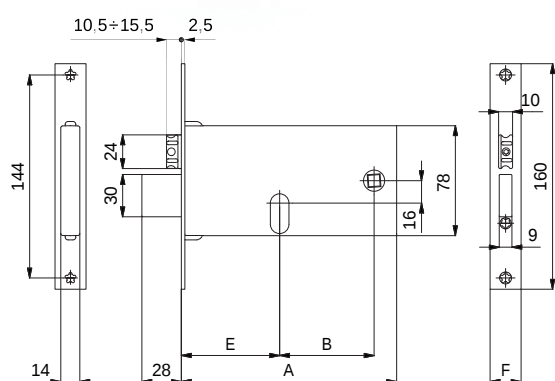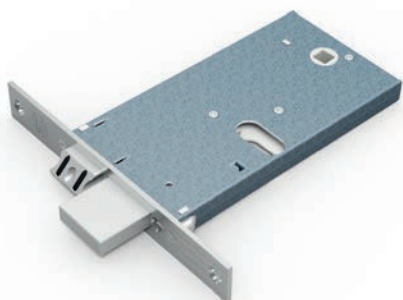**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.




HAND:

Reversible.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws	kg		
370	60	16	133	47	3	0,51	1	10
370/F22	60	22	133	47	3	0,53	1	10
770	70	16	153	67	3	0,55	1	10
770/F22	70	22	153	67	3	0,57	1	10
770-TT/F15	70	14,6	153	67	3	0,56	1	10
870	80	16	163	67	3	0,62	1	10
870/F22	80	22	163	67	3	0,64	1	10
870-TT/F15	80	14,6	163	67	3	0,63	1	10

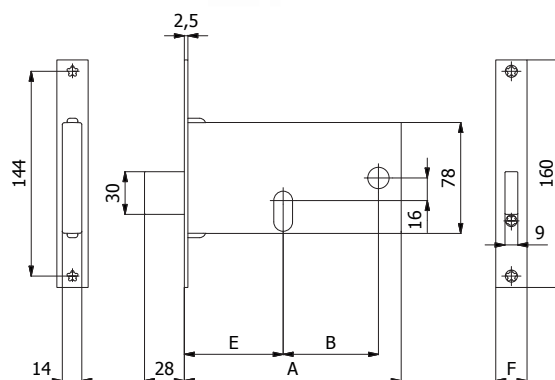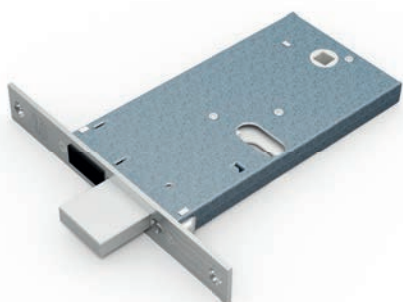**DEAD BOLT****CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:

No hand.


PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws	kg		
371	60	16	133	47	3	0,38	1	10
371/F22	60	22	133	47	3	0,40	1	10
771	70	16	153	67	3	0,43	1	10
771/F22	70	22	153	67	3	0,45	1	10
871	80	16	163	67	3	0,50	1	10
871/F22	80	22	163	67	3	0,52	1	10



DEAD AND ADJUSTABLE ROLLER BOLT

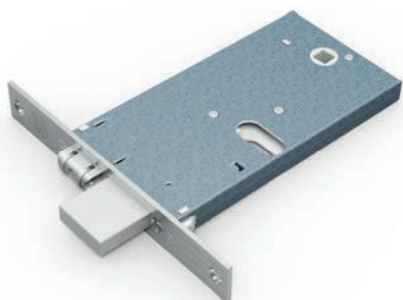

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:


Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.


PROVIDED WITH:

Cylinder screw.

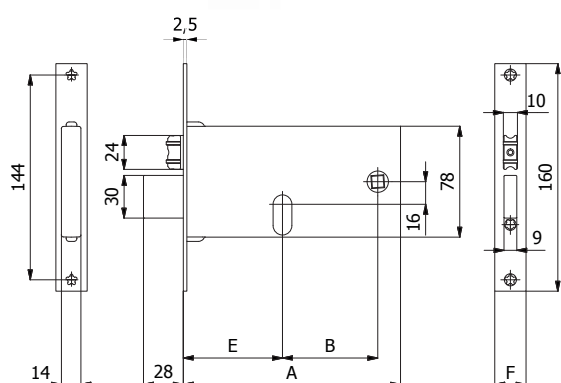

COD.	E	F	A	B	Throws	kg		
375	60	16	133	47	3	0,45	1	10
375/F22	60	22	133	47	3	0,47	1	10
775	70	16	153	67	3	0,49	1	10
775/F22	70	22	153	67	3	0,51	1	10
875	80	16	163	67	3	0,56	1	10
875/F22	80	22	163	67	3	0,58	1	10

HOOK BOLT

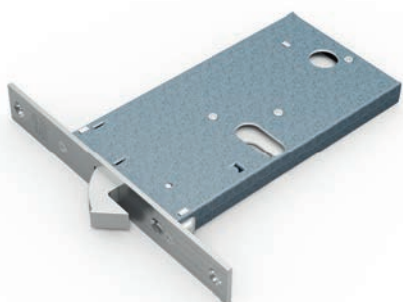

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel hook bolt.

WORKING:


Key driven hook bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

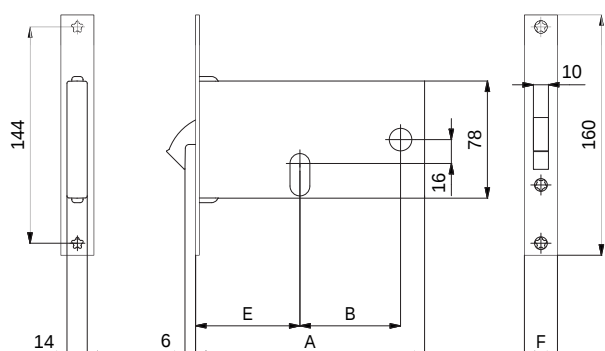

COD.	E	F	A	B	Throws	kg		
376	60	16	133	47	1	0,43	1	10
376/F22	60	22	133	47	1	0,45	1	10
776	70	16	153	67	1	0,48	1	10
776/F22	70	22	153	67	1	0,50	1	10



ADJUSTABLE LATCH BOLT WITH THROWS

Latch bolt interchangeable with roller bolt cod. 0385



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing 8$ mm.

WORKING:


Key driven throws - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

Cylinder screw.

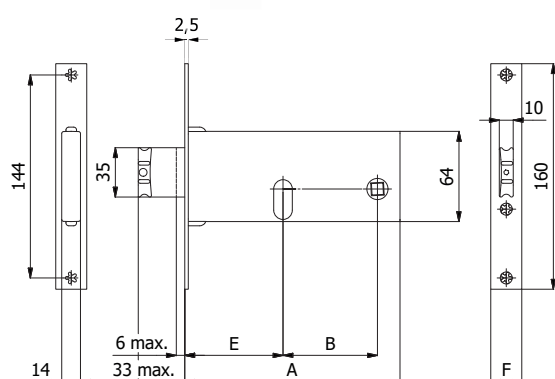

COD.	E	F	A	B	Throws	kg		
380	60	16	133	47	2	0,44	1	10
380/F22	60	22	133	47	2	0,46	1	10
780	70	16	153	67	2	0,48	1	10
780/F22	70	22	153	67	2	0,50	1	10
780-TT/F15	70	14,6	153	67	2	0,48	1	10
880	80	16	163	67	2	0,51	1	10
880/F22	80	22	163	67	2	0,53	1	10
880-TT/F15	80	14,6	163	67	2	0,51	1	10



ADJUSTABLE DEAD BOLT



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt.

WORKING:


Key driven dead bolt.

HAND:

No hand.


PROVIDED WITH:

Cylinder screw.

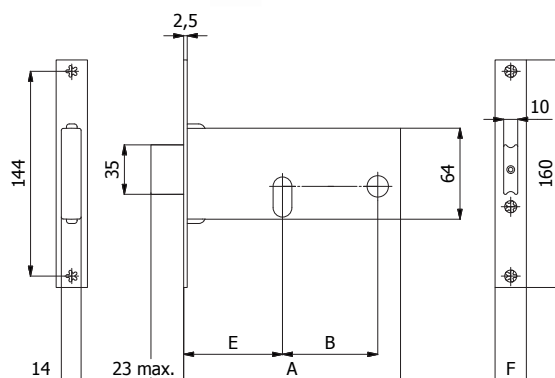

COD.	E	F	A	B	Throws	kg		
381	60	16	133	47	2	0,40	1	10
381/F22	60	22	133	47	2	0,42	1	10
781	70	16	153	67	2	0,44	1	10
781/F22	70	22	153	67	2	0,46	1	10
881	80	16	163	67	2	0,48	1	10
881/F22	80	22	163	67	2	0,50	1	10

DEAD AND ADJUSTABLE LATCH BOLT

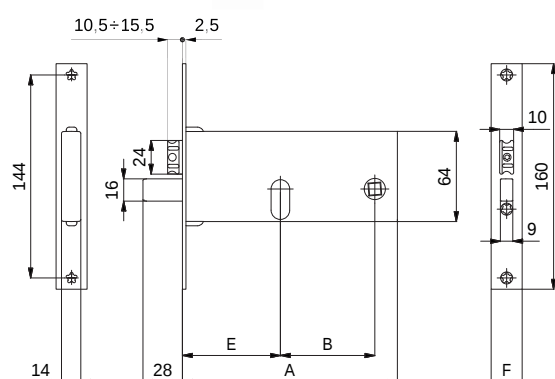

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend
 - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:


Reversible.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws	kg		
782	70	16	153	67	3	0,53	1	10
782/F22	70	22	153	67	3	0,55	1	10
782-TT/F15	70	14,6	153	67	3	0,54	1	10
882	80	16	163	67	3	0,56	1	10
882/F22	80	22	163	67	3	0,58	1	10
882-TT/F15	80	14,6	163	67	3	0,57	1	10

ADJUSTABLE ROLLER BOLT WITH THROWS

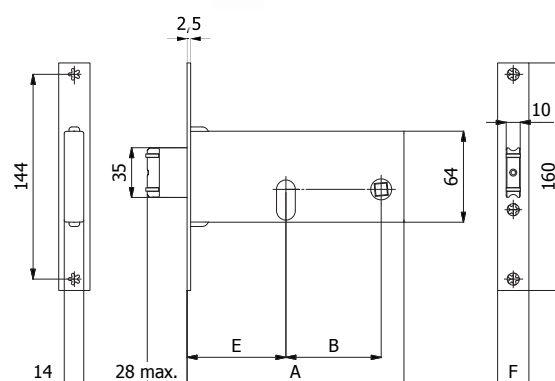

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated brass roller bolt.

WORKING:

Key driven throws - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws	kg		
385	60	16	133	47	2	0,41	1	10
385/F22	60	22	133	47	2	0,43	1	10
785	70	16	153	67	2	0,47	1	10
785/F22	70	22	153	67	2	0,49	1	10
885	80	16	163	67	2	0,47	1	10
885/F22	80	22	163	67	2	0,49	1	10

HOOK BOLT



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel hook bolt.

WORKING:


Key driven hook bolt.

HAND:


No hand.

PROVIDED WITH:

Cylinder screw.

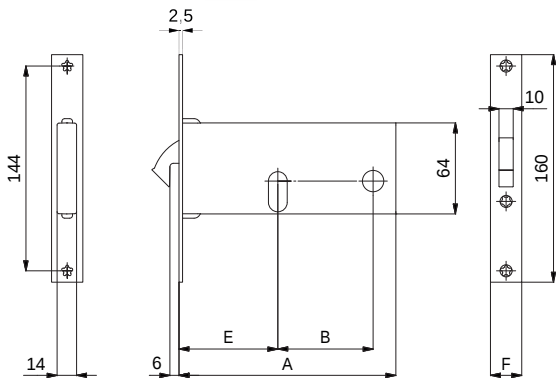


COD.	E	F	A	B	Throws	kg		
386	60	16	133	47	1	0,38	1	10
386/F22	60	22	133	47	1	0,40	1	10
786	70	16	153	67	1	0,41	1	10
786/F22	70	22	153	67	1	0,43	1	10



ADJUSTABLE LATCH BOLT WITH THROWS

Latch bolt interchangeable with roller bolt cod. 0395

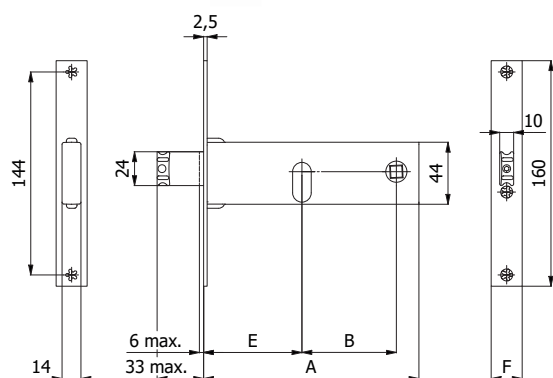**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend -
Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy
square spindle device $\varnothing 8$ mm

WORKING:

Key driven throws - Handle or key driven latch bolt.


HAND:

Reversible.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws			
390	60	16	133	47	2	0,36	1	10
390/F22	60	22	133	47	2	0,38	1	10
790	70	16	153	67	2	0,39	1	10
790/F22	70	22	153	67	2	0,41	1	10
790-TT/F15	70	14,6	153	67	2	0,39	1	10
890	80	16	163	67	2	0,40	1	10
890/F22	80	22	163	67	2	0,42	1	10
890-TT/F15	80	14,6	163	67	2	0,40	1	10
990	90	16	173	67	2	0,42	1	10
990/F22	90	22	173	67	2	0,44	1	10
990-TT/F15	90	14,6	173	67	2	0,42	1	10

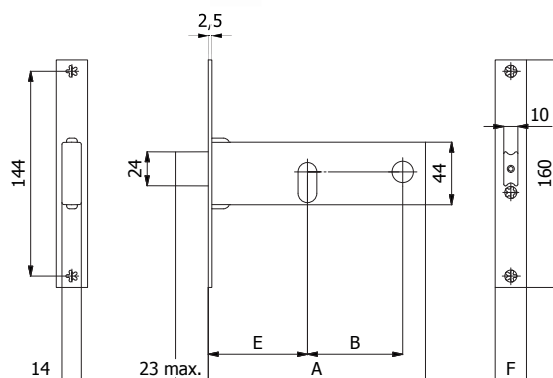ADJUSTABLE DEAD BOLT**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend -
Nickel-plated special alloy dead bolt.

WORKING:

Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws			
391	60	16	133	47	2	0,33	1	10
391/F22	60	22	133	47	2	0,35	1	10
791	70	16	153	67	2	0,36	1	10
791/F22	70	22	153	67	2	0,38	1	10
891	80	16	163	67	2	0,40	1	10
891/F22	80	22	163	67	2	0,42	1	10
991	90	16	173	67	2	0,48	1	10
991/F22	90	22	173	67	2	0,50	1	10



ADJUSTABLE ROLLER BOLT WITH THROWS



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated brass roller bolt.

WORKING:


Key driven throws - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

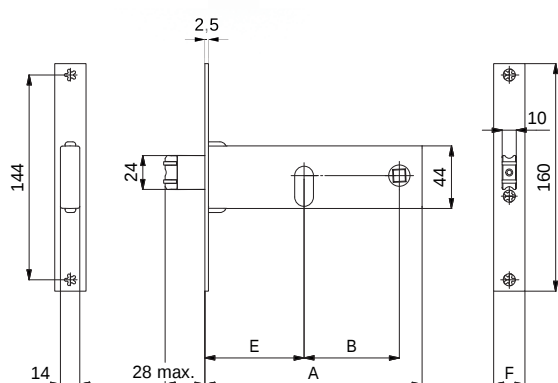

COD.	E	F	A	B	Throws	kg		
395	60	16	133	47	2	0,34	1	10
395/F22	60	22	133	47	2	0,36	1	10
795	70	16	153	67	2	0,38	1	10
795/F22	70	22	153	67	2	0,40	1	10
895	80	16	163	67	2	0,38	1	10
895/F22	80	22	163	67	2	0,40	1	10
995	90	16	173	67	2	0,39	1	10
995/F22	90	22	173	67	2	0,41	1	10



HOOK BOLT



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy hook bolt.

WORKING:


Key driven hook bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

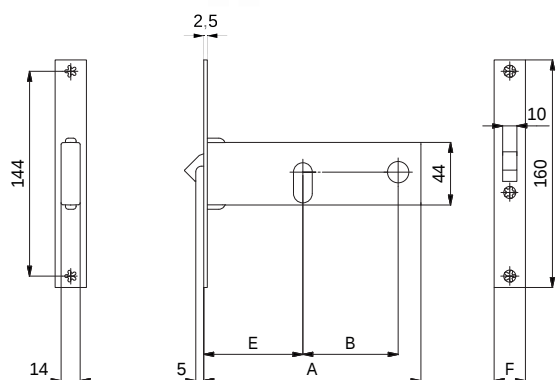

COD.	E	F	A	B	Throws	kg		
396	60	16	133	47	1	0,30	1	10
396/F22	60	22	133	47	1	0,32	1	10
796	70	16	153	67	1	0,33	1	10
796/F22	70	22	153	67	1	0,35	1	10

DEAD AND ADJUSTABLE LATCH BOLT

Latch bolt interchangeable with roller bolt cod.0535

**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm.

WORKING:


Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

Cylinder screw.

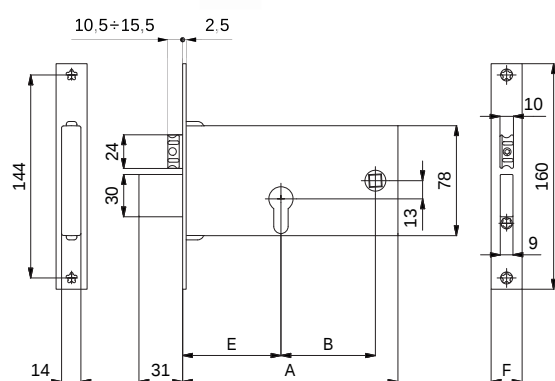

COD.	E	F	A	B	Throws	kg		
1770	70	16	153	67	3	0,58	1	10
1770/F22	70	22	153	67	3	0,60	1	10

DEAD AND ADJUSTABLE LATCH BOLT

LOWER SQUARE SPINDLE DEVICE

Latch bolt interchangeable with roller bolt cod.0535

**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm.

WORKING:


Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.


PROVIDED WITH:

Cylinder screw.

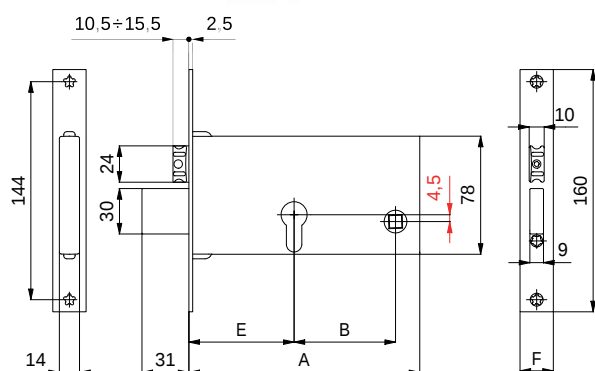

COD.	E	F	A	B	Throws	kg		
1870.70.16	70	16	153	67	3	0,58	1	10
1870.70.22	70	22	153	67	3	0,60	1	10

DEAD BOLT

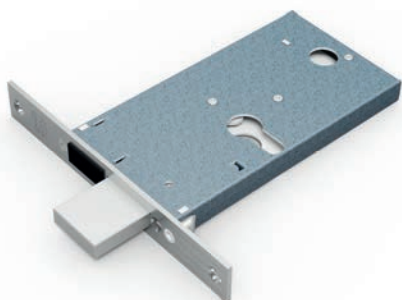

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:


Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:


Cylinder screw.

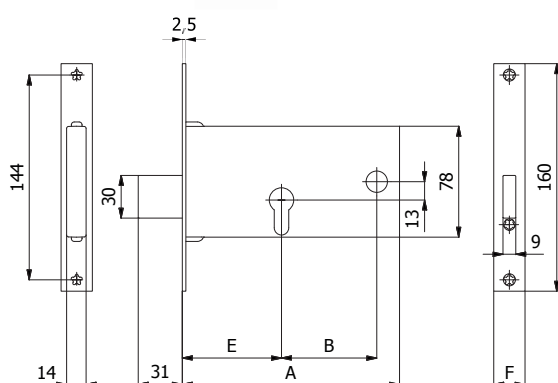

COD.	E	F	A	B	Throws	kg		
1771	70	16	153	67	3	0,51	1	10
1771/F22	70	22	153	67	3	0,53	1	10



DEAD AND ADJUSTABLE ROLLER BOLT

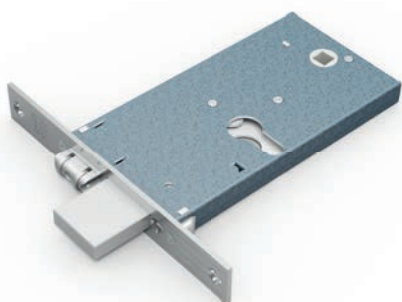

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:


Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.


PROVIDED WITH:

Cylinder screw.

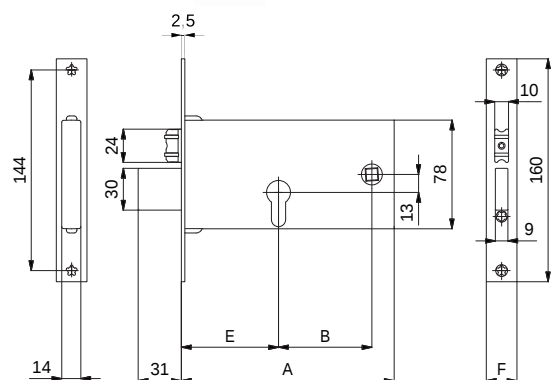

COD.	E	F	A	B	Throws	kg		
1775	70	16	153	67	3	0,53	1	10
1775/F22	70	22	153	67	3	0,55	1	10

HOOK BOLT

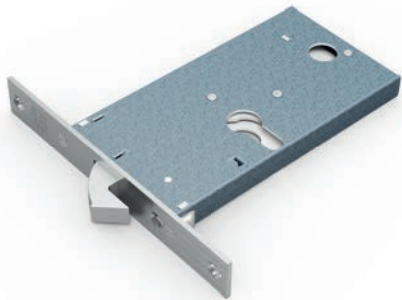

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel hook bolt.

WORKING:


Key driven hook bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

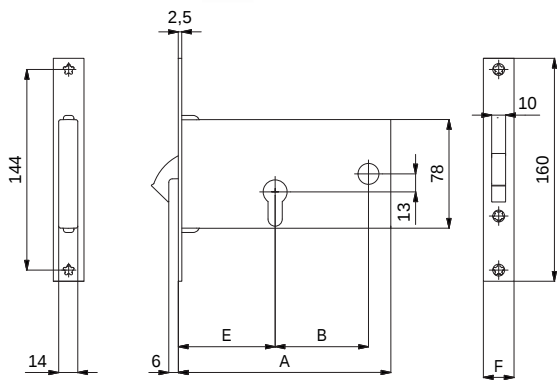

COD.	E	F	A	B	Throws			
1776	70	16	153	67	1	0,51	1	10
1776/F22	70	22	153	67	1	0,53	1	10



ADJUSTABLE LATCH BOLT WITH THROWS

Latch bolt interchangeable with roller bolt cod. 0385



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing 8$ mm.

WORKING:


Key driven throws - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:


Cylinder screw.

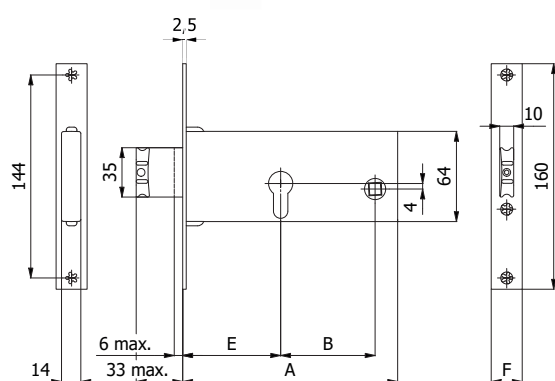

COD.	E	F	A	B	Throws	kg		
1380	60	16	133	47	2	0,46	1	10
1380/F22	60	22	133	47	2	0,48	1	10
1780	70	16	153	67	2	0,50	1	10
1780/F22	70	22	153	67	2	0,52	1	10



ADJUSTABLE DEAD BOLT

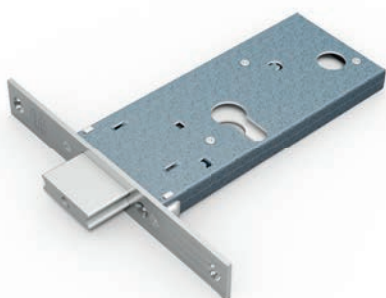

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt.

WORKING:


Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

Cylinder screw.

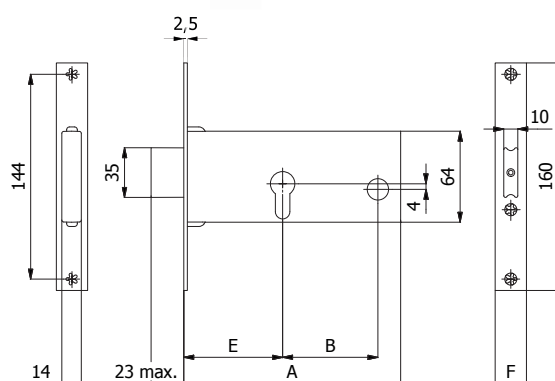

COD.	E	F	A	B	Throws	kg		
1381	60	16	133	47	2	0,42	1	10
1381/F22	60	22	133	47	2	0,44	1	10
1781	70	16	153	67	2	0,46	1	10
1781/F22	70	22	153	67	2	0,48	1	10

ADJUSTABLE ROLLER BOLT WITH THROWS

**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated brass roller bolt.

WORKING:


Key driven throws - Pressure or key driven roller bolt.

HAND:



No hand.

PROVIDED WITH:

Cylinder screw.

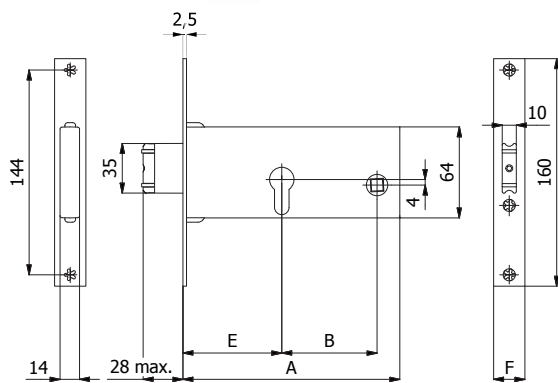

COD.	E	F	A	B	Throws			
1385	60	16	133	47	2	0,45	1	10
1385/F22	60	22	133	47	2	0,47	1	10
1785	70	16	153	67	2	0,49	1	10
1785/F22	70	22	153	67	2	0,51	1	10

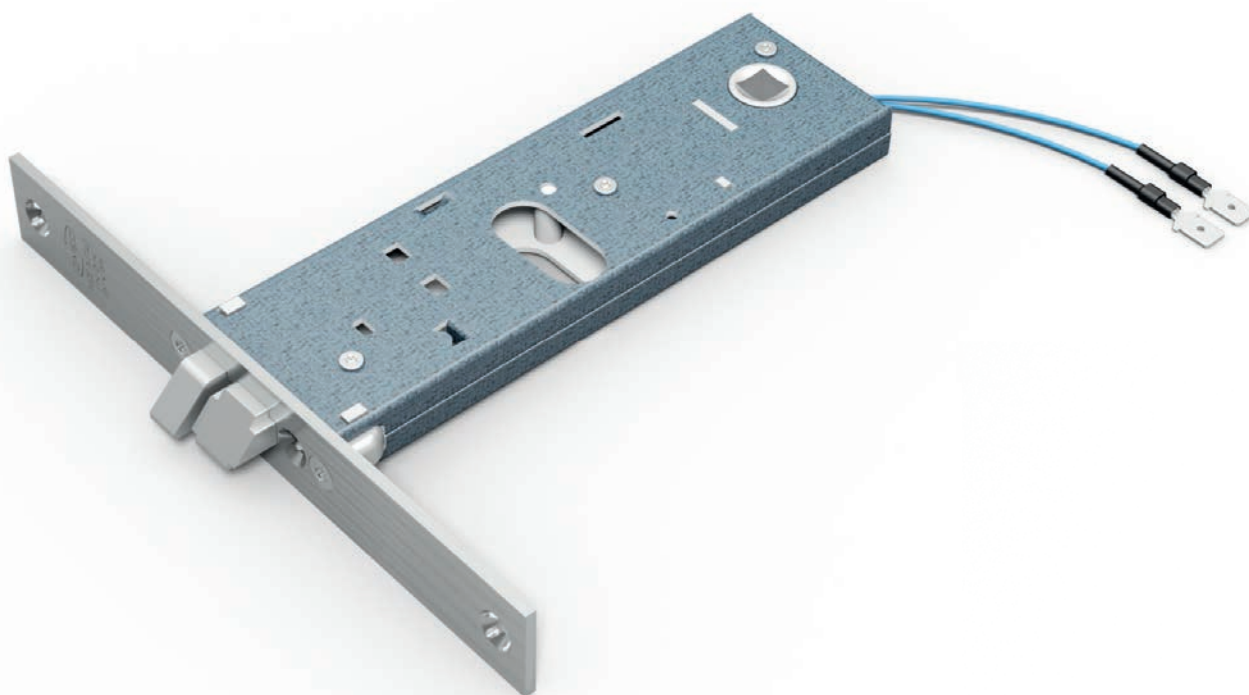

SECURITY

Working is assured also without electricity



MATERIALS

Stainless steel forend and springs
Zinc-plated steel lockcase



EASY TO INSTALL

The cables protrude from the lock case, making the connection much easier, with no need to use a screwdriver or an hex key, just connecting the two faston terminals





POWER SUPPLY

To install the electric locks use transformers 12V-15W
Tear resistant coil set cod. 035

LATCH BOLT WITH THROW

With throw exclusion system

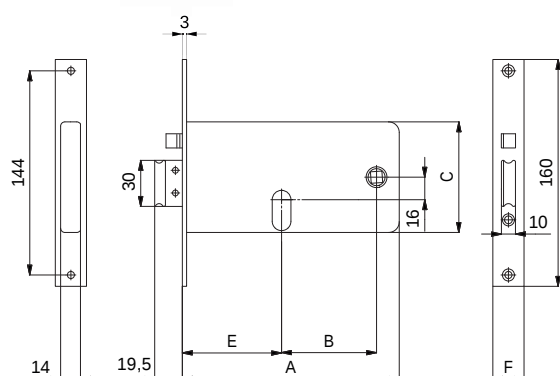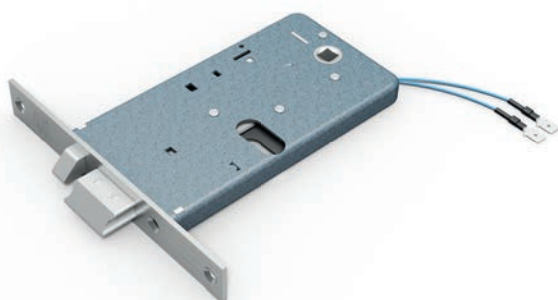**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel faceplate - Nickel-plated special alloy latch bolt - Nickel-plated steel piston - Zinc-plated special alloy square spindle device $\varnothing 8$ mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key driven throw - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.



HAND:

Reversible.

PROVIDED WITH:

Cylinder screw, assembling instructions.

COD.	E	F	A	B	C	Throws	kg		
377	60	16	133	47	84	1	0,55	1	10
377/F22	60	22	133	47	84	1	0,58	1	10
777	70	16	153	67	78	1	0,59	1	10
777/F22	70	22	153	67	78	1	0,61	1	10
877	80	16	163	67	78	1	0,65	1	10
877/F22	80	22	163	67	78	1	0,67	1	10

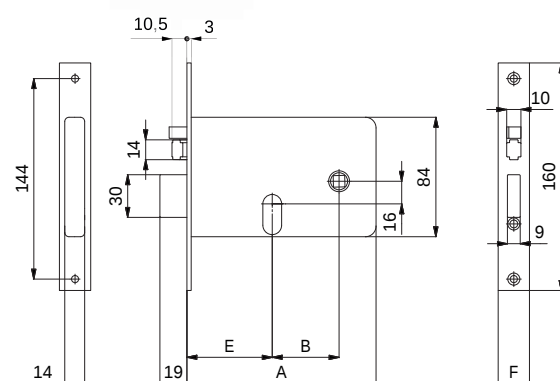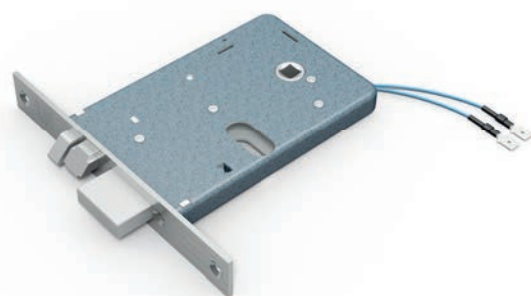DEAD AND LATCH BOLT (NOT REVERSIBLE)**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Nickel and chrome-plated steel forend - Nickel-plated steel dead bolt and piston - Nickel-plated special alloy latch bolt - Zinc-plated special alloy square spindle device $\varnothing 8$ mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key driven dead bolt - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:


DX = right - SX = left.

PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	B	Throws	kg		
378 DX	60	16	133	47	2	0,56	1	10
378 SX	60	16	133	47	2	0,56	1	10
378/F22 DX	60	22	133	47	2	0,58	1	10
378/F22 SX	60	22	133	47	2	0,58	1	10

DEAD AND LATCH BOLT

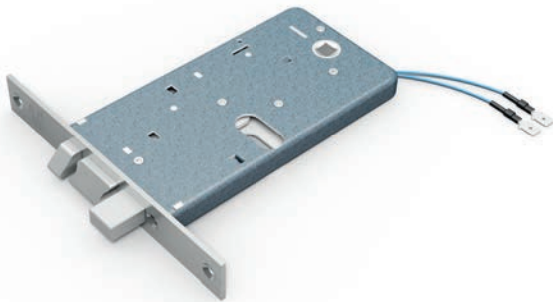

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Nickel and chrome-plated steel forend - Nickel-plated special alloy dead and latch bolt - Nickel-plated steel piston - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key driven dead bolt - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:


With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:


Reversible.

PROVIDED WITH:

Cylinder screw, assembling instructions.


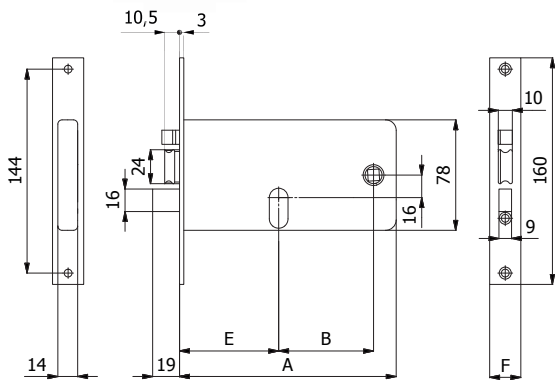


COD.	E	F	A	B	Throws			
778	70	16	153	67	2	0,63	1	10
778/F22	70	22	153	67	2	0,65	1	10
878	80	16	163	67	2	0,70	1	10
878/F22	80	22	163	67	2	0,72	1	10



LATCH BOLT WITH THROW

With throw exclusion system

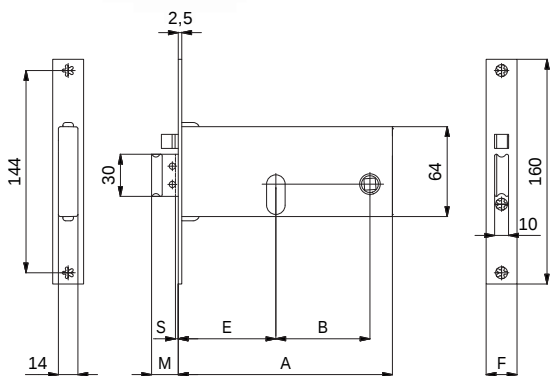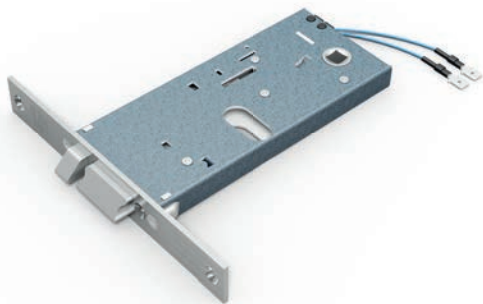

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy latch bolt - Nickel-plated steel piston - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key driven throw - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:



Reversible.

PROVIDED WITH:

Cylinder screw, assembling instructions.

COD.	E	F	A	B	M	S	Throws			
388	60	16	133	47	19	-	1	0,49	1	10
388/F22	60	22	133	47	19	-	1	0,51	1	10
788	70	16	153	67	19	-	1	0,54	1	10
788/F22	70	22	153	67	19	-	1	0,56	1	10
788-TT/F15	70	14,6	153	67	24	6	1	0,55	1	10
888	80	16	163	67	19	-	1	0,55	1	10
888/F22	80	22	163	67	19	-	1	0,57	1	10
888-TT/F15	80	14,6	163	67	24	6	1	0,56	1	10

LATCH BOLT (NOT REVERSIBLE)

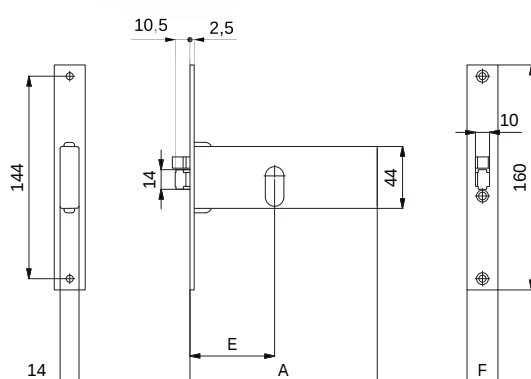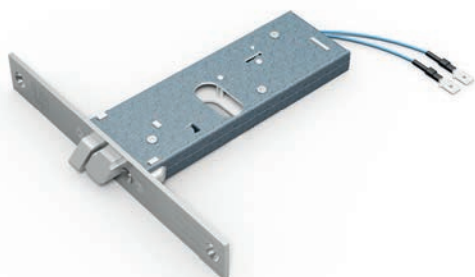

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy latch bolt - Nickel-plated steel piston - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:

DX = right - SX = left.


PROVIDED WITH:

Cylinder screw.

COD.	E	F	A	kg		
399 DX	60	16	133	0,33	1	10
399 SX	60	16	133	0,33	1	10
399/F22 DX	60	22	133	0,35	1	10
399/F22 SX	60	22	133	0,35	1	10



LATCH BOLT

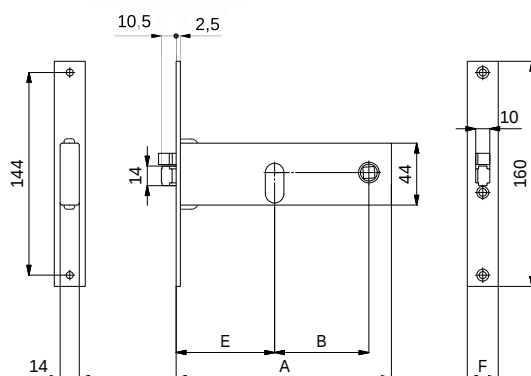

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy latch bolt - Nickel-plated steel piston - Zinc-plated special alloy square spindle device $\varnothing 8$ mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:



Reversible.

PROVIDED WITH:

Cylinder screw, assembling instructions.

COD.	E	F	A	B	kg		
799	70	16	153	67	0,38	1	10
799/F22	70	22	153	67	0,40	1	10
899	80	16	163	67	0,39	1	10
899/F22	80	22	163	67	0,41	1	10
999	90	16	173	67	0,41	1	10
999/F22	90	22	173	67	0,43	1	10

LATCH BOLT WITH THROW
With throw exclusion system

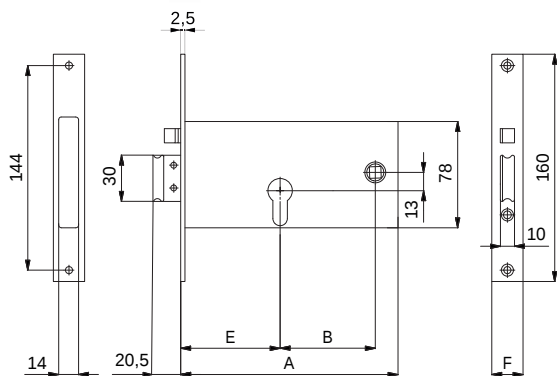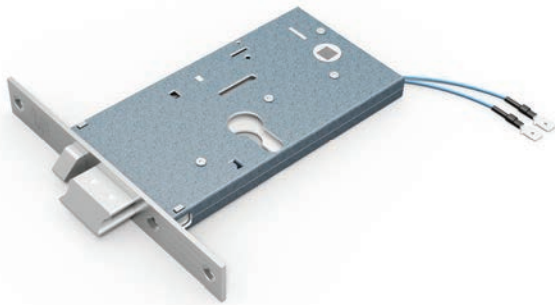

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy latch bolt - Nickel-plated steel piston - Zinc-plated special alloy square spindle device $\square$ 8 mm - Coil set cod. 035 (12V-15W a.c.) CE.

WORKING:

Key driven throw - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.



HAND:

Reversible.

PROVIDED WITH:

Cylinder screw, assembling instructions.

COD.	E	F	A	B	Throws			
1777	70	16	153	67	1	0,60	1	10
1777/F22	70	22	153	67	1	0,62	1	10

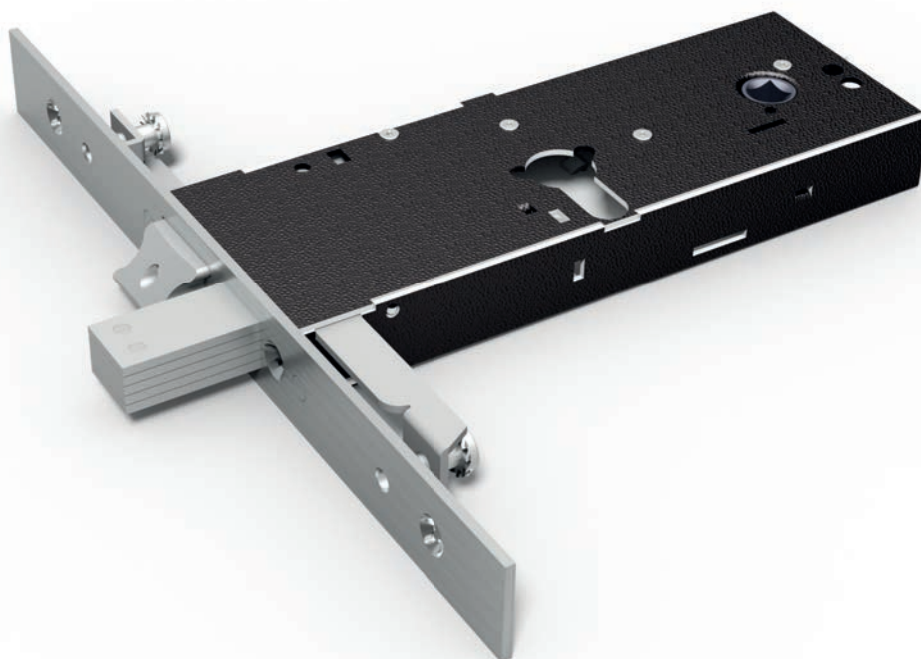

SECURITY

Layered steel dead bolt
Up to 3 locking points
Versions available with Euro profile cylinder and cross key cylinder



MATERIALS

Stainless steel forend and springs
Zinc-plated steel lock case



EASY TO TURN

Adjustable latch bolt ~ 5 mm
interchangeable with roller bolt and plug
Roller bolt cod. 05935 - Plug cod. 05931



CROSS KEY CYLINDER


Cod. 4062 with standard keys
Cod. 4062/1 with long keys





DEAD AND ADJUSTABLE LATCH BOLT

Latch bolt interchangeable with roller bolt cod. 05935

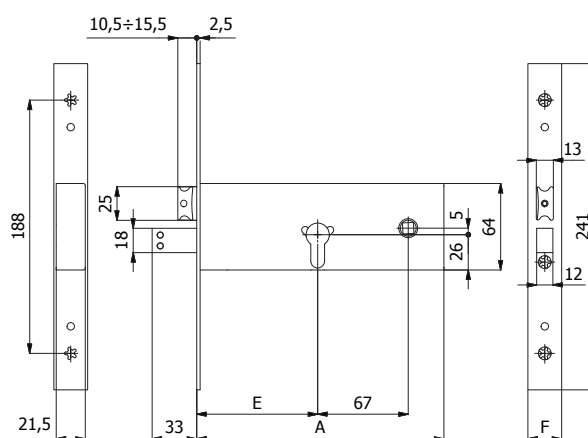

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\square$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.


For series 1940: 2 roses cod. 0120 N, cylinder screw.

For series 4940: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1940	90	25	186	3			0,96	1	5
1940/F22	90	22	186	3			0,94	1	5
11140	110	25	206	3			1,03	1	5
11140/F22	110	22	206	3			1,01	1	5
4940	90	25	186	3			1,04	1	5
4940/F22	90	22	186	3	cod. 4062	cod. 4100	1,02	1	5
41140	110	25	206	3			1,11	1	5
41140/F22	110	22	206	3			1,09	1	5
4***/1		Long keys			cod. 4062/1	cod. 4101	+ 0,02	-	-



DEAD BOLT

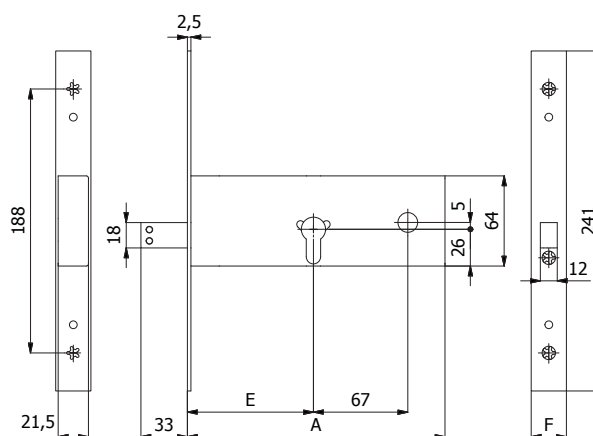

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

For series 1941: 2 roses cod. 0120 N, cylinder screw.


For series 4941: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1941	90	25	186	3			0,76	1	5
1941/F22	90	22	186	3			0,74	1	5
11141	110	25	206	3			0,83	1	5
11141/F22	110	22	206	3			0,81	1	5
4941	90	25	186	3			0,84	1	5
4941/F22	90	22	186	3	cod. 4062	cod. 4100	0,82	1	5
41141	110	25	206	3			0,91	1	5
41141/F22	110	22	206	3			0,89	1	5
4***/1		Long keys			cod. 4062/1	cod. 4101	+ 0,02	-	-





DEAD AND ADJUSTABLE ROLLER BOLT

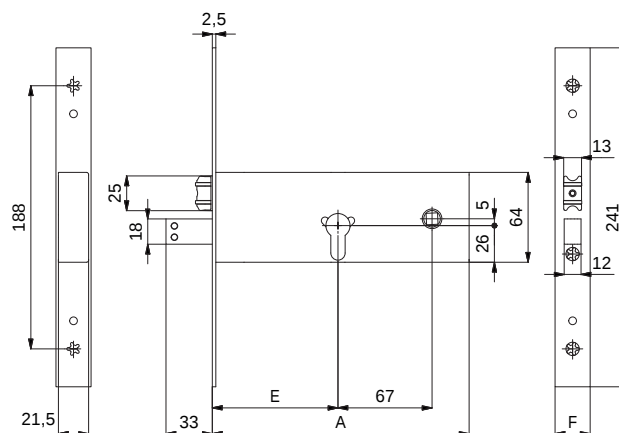**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:

Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:

2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

For series 1945: 2 roses cod. 0120 N, cylinder screw.


For series 4945: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1945	90	25	186	3			0,96	1	5
1945/F22	90	22	186	3			0,94	1	5
11145	110	25	206	3			1,03	1	5
11145/F22	110	22	206	3			1,01	1	5
4945	90	25	186	3			1,04	1	5
4945/F22	90	22	186	3	cod. 4062	cod. 4100	1,02	1	5
41145	110	25	206	3			1,11	1	5
41145/F22	110	22	206	3			1,09	1	5
4***/1		Long keys			cod. 4062/1	cod. 4101	+ 0,02	-	-



DEAD AND ADJUSTABLE LATCH BOLT 3 LOCKING POINTS

Latch bolt interchangeable with roller bolt cod. 05935

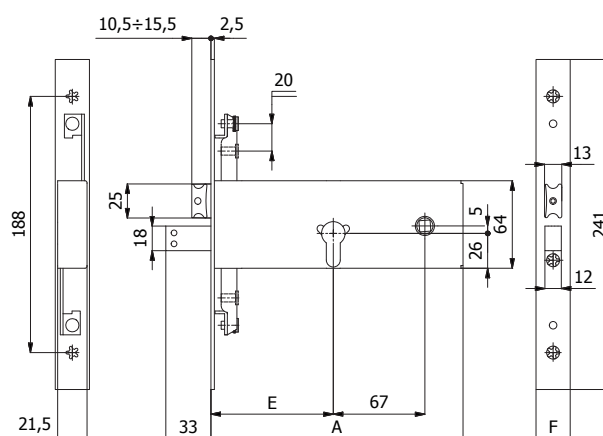

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\square$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.


For series 1970: 2 roses cod. 0120 N, cylinder screw.

For series 4970: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1970	90	25	186	3		-	1,04	1	5
1970/F22	90	22	186	3			1,02	1	5
11170	110	25	206	3			1,11	1	5
11170/F22	110	22	206	3			1,09	1	5
4970	90	25	186	3	cod. 4062 	cod. 4100 	1,12	1	5
4970/F22	90	22	186	3			1,10	1	5
41170	110	25	206	3			1,19	1	5
41170/F22	110	22	206	3			1,17	1	5
4***/1	Long keys				cod. 4062/1 	cod. 4101 	+ 0,02	-	-



DEAD BOLT 3 LOCKING POINTS

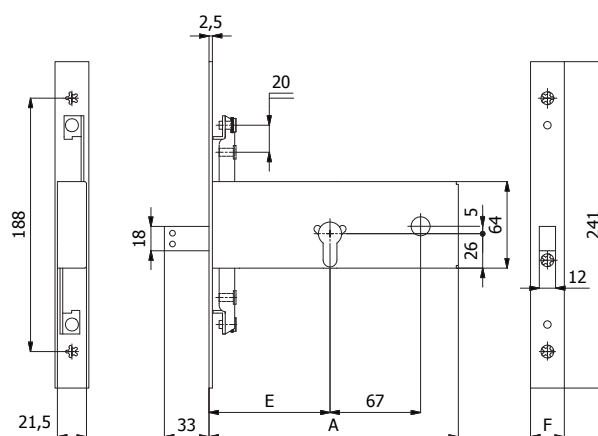

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.


For series 1971: 2 roses cod. 0120 N, cylinder screw.

For series 4971: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1971	90	25	186	3		-	0,84	1	5
1971/F22	90	22	186	3			0,82	1	5
11171	110	25	206	3			0,91	1	5
11171/F22	110	22	206	3			0,89	1	5
4971	90	25	186	3	cod. 4062 	cod. 4100 	0,92	1	5
4971/F22	90	22	186	3			0,90	1	5
41171	110	25	206	3			0,99	1	5
41171/F22	110	22	206	3			0,97	1	5
4***/1	Long keys				cod. 4062/1 	cod. 4101 	+ 0,02	-	-



DEAD AND ADJUSTABLE ROLLER BOLT 3 LOCKING POINTS

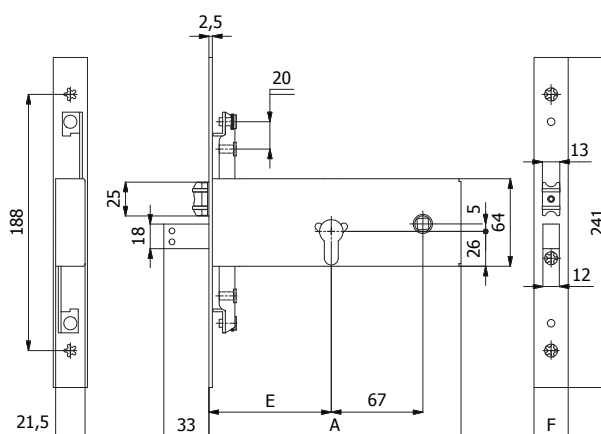

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:

Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:


2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

For series 1975: 2 roses cod. 0120 N, cylinder screw.

For series 4975: Cross key cylinder cod. 4062 or 4062/1 (with long keys) , 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1975	90	25	186	3			1,04	1	5
1975/F22	90	22	186	3			1,02	1	5
11175	110	25	206	3			1,11	1	5
11175/F22	110	22	206	3			1,09	1	5
4975	90	25	186	3			1,12	1	5
4975/F22	90	22	186	3	cod. 4062	cod. 4100	1,10	1	5
41175	110	25	206	3			1,19	1	5
41175/F22	110	22	206	3			1,17	1	5
4***/1		Long keys			cod. 4062/1	cod. 4101	+ 0,02	-	-



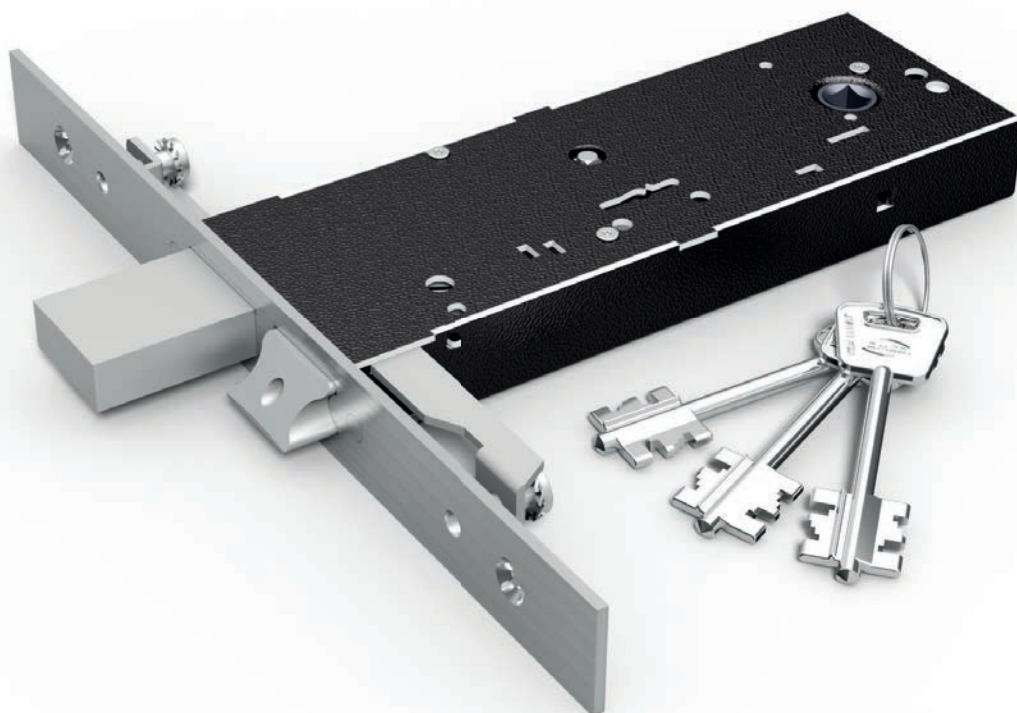

SECURITY

Layered steel dead bolt
Up to 3 locking points
Provided with double-bit keys



MATERIALS

Stainless steel forend and springs
Zinc-plated steel lock case
Nickel-plated brass keys




EASY TO TURN

Adjustable latch bolt ~ 5 mm
interchangeable with roller bolt and plug
Roller bolt cod. 05935 - Plug cod. 05931
(but cod. 5950 - 5980)

DEAD AND ADJUSTABLE LATCH BOLT

Latch bolt interchangeable with roller bolt cod. 05935

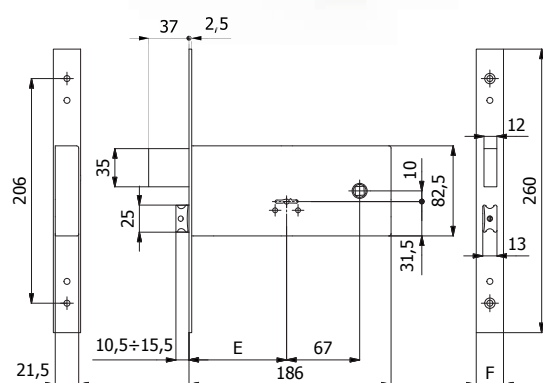**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend -
Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt -
Burnished steel square spindle device $\varnothing$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.


HAND:

Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5930	90	25	5100/06	4	1,32	1	5
5930/F22	90	22	5100/06	4	1,30	1	5
5930/1	Long keys		5101/06	-	+ 0,01	-	-

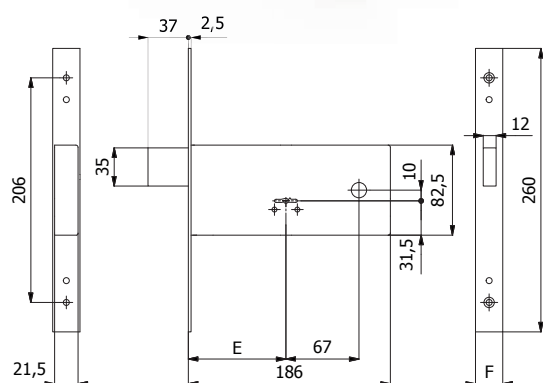**DEAD BOLT****CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend -
Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:


No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5931	90	25	5100/06	4	1,10	1	5
5931/F22	90	22	5100/06	4	1,08	1	5
5931/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND ADJUSTABLE ROLLER BOLT

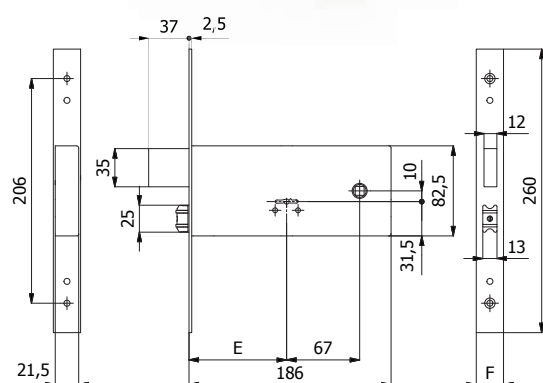

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:

Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.


PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5935	90	25	5100/06	4	1,18	1	5
5935/F22	90	22	5100/06	4	1,16	1	5
5935/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND ADJUSTABLE LATCH BOLT 3 LOCKING POINTS

Latch bolt interchangeable with roller bolt cod. 05935

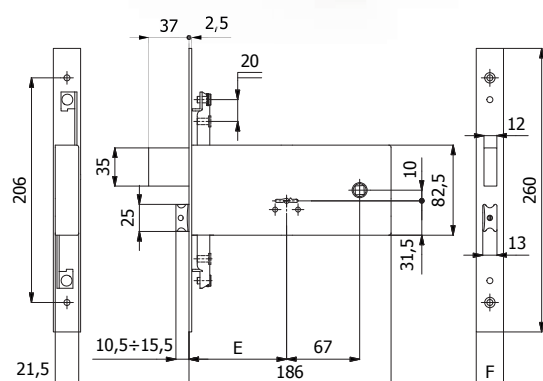

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\square$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:


Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5960	90	25	5100/06	4	1,40	1	5
5960/F22	90	22	5100/06	4	1,38	1	5
5960/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD BOLT 3 LOCKING POINTS

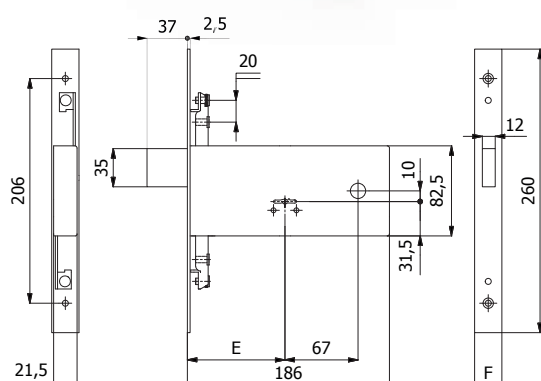

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:

No hand.


PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5961	90	25	5100/06	4	1,19	1	5
5961/F22	90	22	5100/06	4	1,17	1	5
5961/1	Long keys		5101/06	-	+ 0,01	-	-



DEAD AND ADJUSTABLE ROLLER BOLT 3 LOCKING POINTS

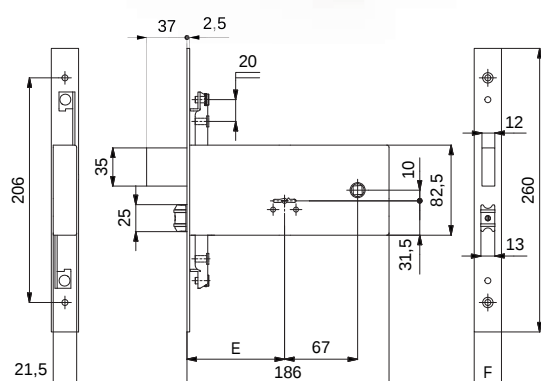

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:

Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.



PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5965	90	25	5100/06	4	1,29	1	5
5965/F22	90	22	5100/06	4	1,27	1	5
5965/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND ADJUSTABLE LATCH BOLT

Latch bolt interchangeable with roller bolt cod. 05935

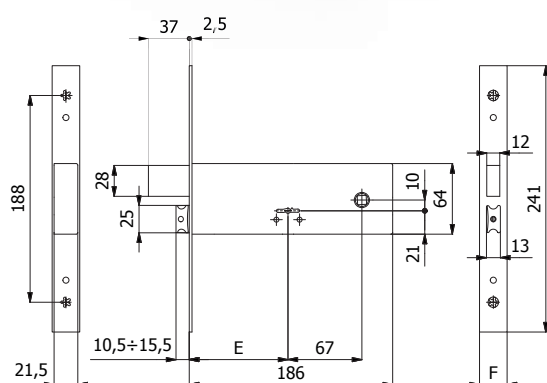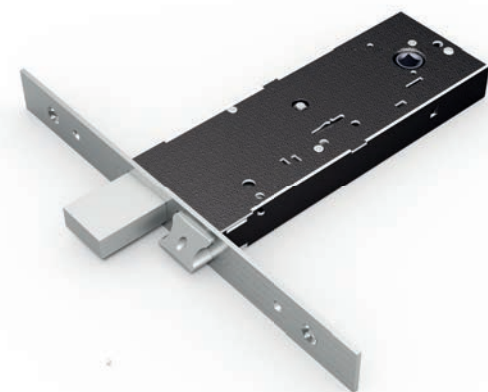**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.



HAND:

Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5940	90	25	5100/06	4	1,12	1	5
5940/F22	90	22	5100/06	4	1,10	1	5
5940/1	Long keys		5101/06	-	+ 0,01	-	-

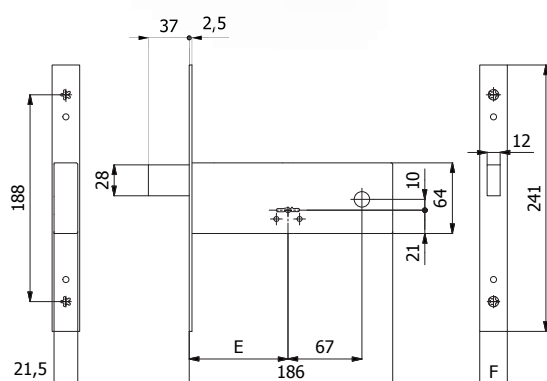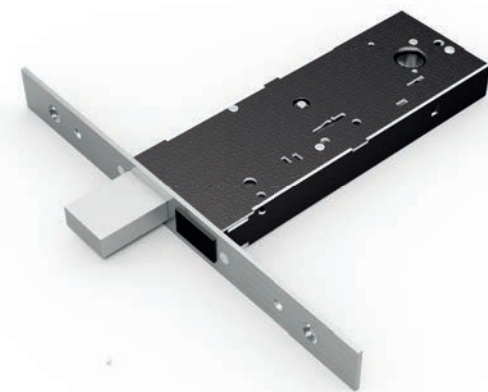DEAD BOLT**CONSTRUCTIVE FEATURES:**

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:

Key driven dead bolt.

HAND:


No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5941	90	25	5100/06	4	0,92	1	5
5941/F22	90	22	5100/06	4	0,90	1	5
5941/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND ADJUSTABLE ROLLER BOLT

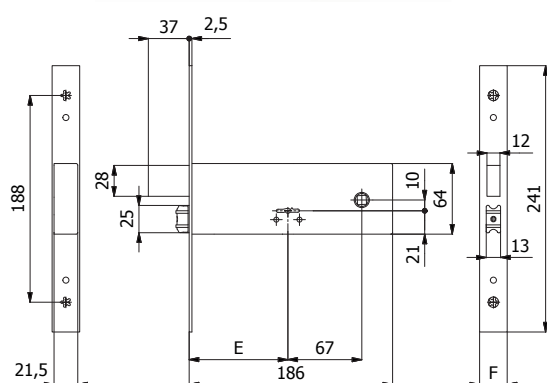

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:

Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:


3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5945	90	25	5100/06	4	1,00	1	5
5945/F22	90	22	5100/06	4	0,98	1	5
5945/1	Long keys		5101/06	-	+ 0,01	-	-



DEAD AND ADJUSTABLE LATCH BOLT 3 LOCKING POINTS

Latch bolt interchangeable with roller bolt cod. 05935

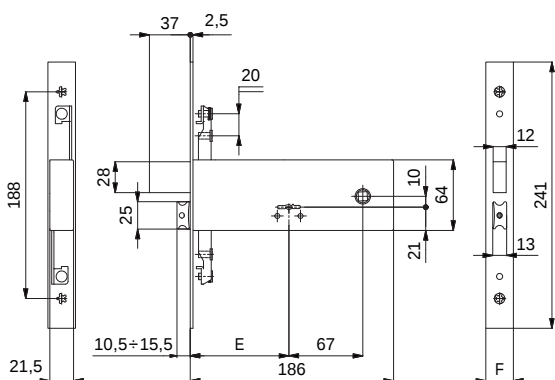

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\square$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:


Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5970	90	25	5100/06	4	1,20	1	5
5970/F22	90	22	5100/06	4	1,18	1	5
5970/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD BOLT 3 LOCKING POINTS

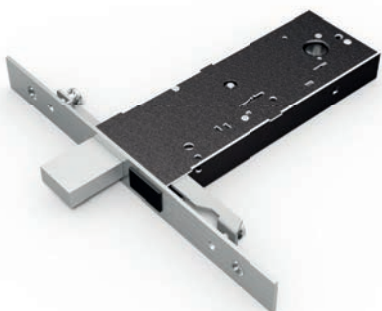

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:


Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

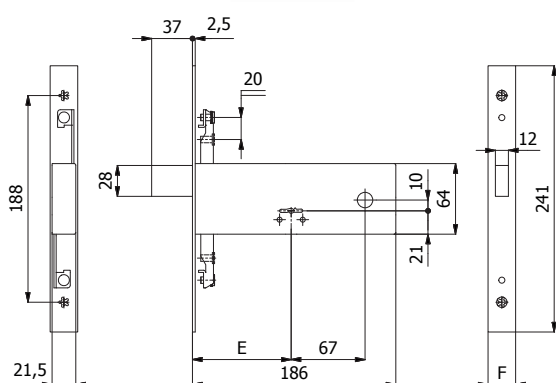

COD.	E	F		Throws	 kg		
5971	90	25	5100/06	4	1,00	1	5
5971/F22	90	22	5100/06	4	0,98	1	5
5971/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND ADJUSTABLE ROLLER BOLT 3 LOCKING POINTS



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated brass roller bolt.

WORKING:


Key driven dead bolt - Pressure or key driven roller bolt.

HAND:

No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

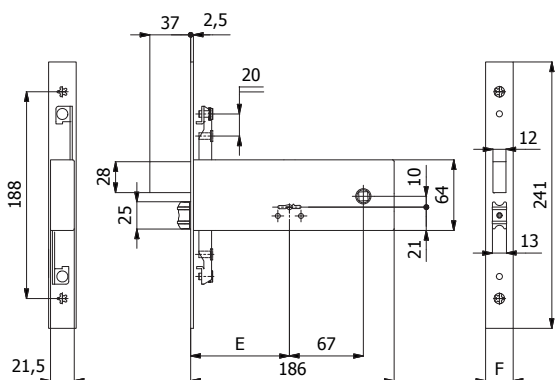

COD.	E	F		Throws	 kg		
5975	90	25	5100/06	4	1,10	1	5
5975/F22	90	22	5100/06	4	1,08	1	5
5975/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND LATCH BOLT



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm.

WORKING:


Key driven dead bolt - Handle or key driven latch bolt.

HAND:


Reversible.

PROVIDED WITH:


3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

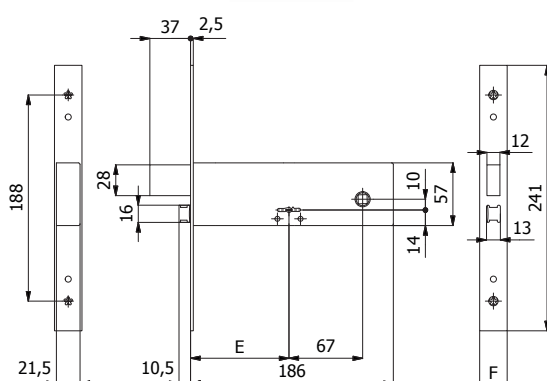

COD.	E	F		Throws	 kg		
5950	90	25	5100/06	4	1,08	1	5
5950/F22	90	22	5100/06	4	1,06	1	5
5950/1	Long keys		5101/06	-	+ 0,01	-	-



DEAD BOLT

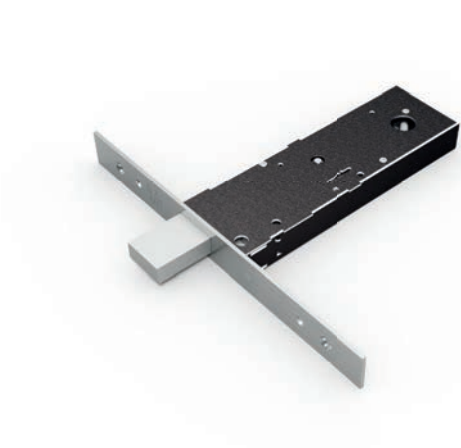

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:


Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

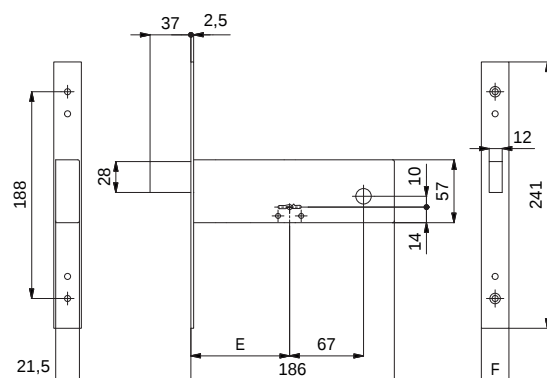

COD.	E	F		Throws	 kg		
5951	90	25	5100/06	4	0,88	1	5
5951/F22	90	22	5100/06	4	0,86	1	5
5951/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND LATCH BOLT 3 LOCKING POINTS



CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm.

WORKING:


Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.


PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

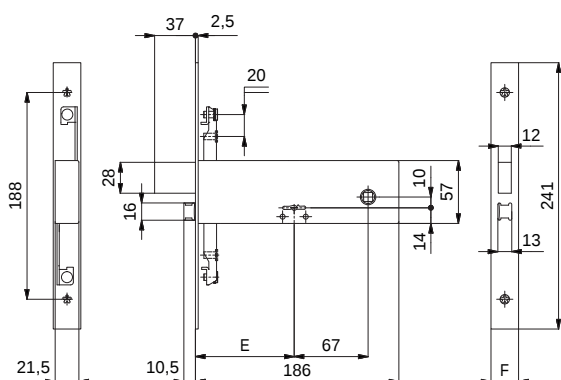

COD.	E	F		Throws	 kg		
5980	90	25	5100/06	4	1,16	1	5
5980/F22	90	22	5100/06	4	1,14	1	5
5980/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD BOLT 3 LOCKING POINTS

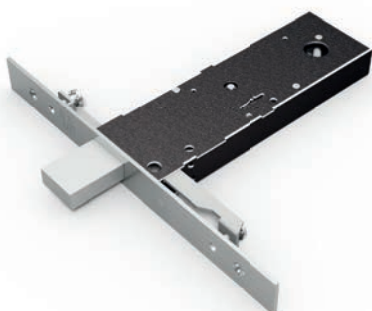

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt.

WORKING:


Key driven dead bolt.

HAND:


No hand.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

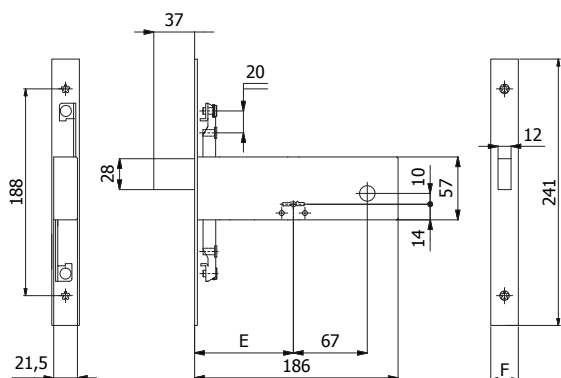

COD.	E	F		Throws	 kg		
5981	90	25	5100/06	4	0,96	1	5
5981/F22	90	22	5100/06	4	0,94	1	5
5981/1	Long keys		5101/06	-	+ 0,01	-	-



SECURITY

Layered steel dead bolt
Up to 3 locking points
Provided with double-bit keys
Working is assured also without electricity



MATERIALS

Stainless steel forend and springs
Zinc-plated steel lock case
Nickel-plated brass keys



EASY TO INSTALL



The cables protrude from the lock case, making the connection much easier, with no need to use a screwdriver or an hex key, just connecting the two faston terminals



POWER SUPPLY

To install the electric locks use transformers 12V-10W
Tear resistant coil set cod. 049

DEAD AND LATCH BOLT

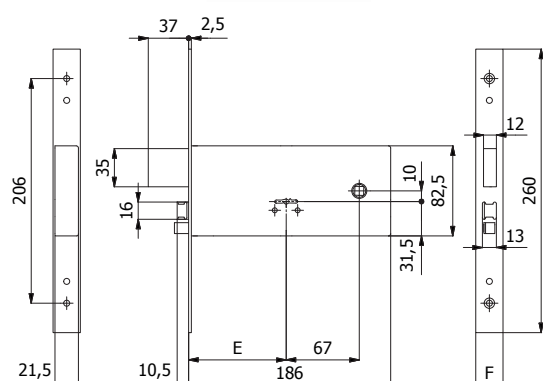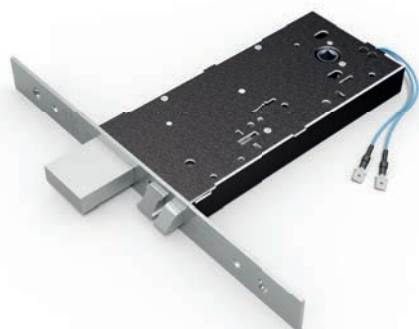

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated steel piston - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm - Coil set cod. 049 (12V-10W a.c.) CE.

WORKING:


Key driven dead bolt - Key, handle or remote control driven latch bolt - Working is assured also without electricity.

HAND:


Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5938	90	25	5100/06	4	1,33	1	5
5938/F22	90	22	5100/06	4	1,31	1	5
5938/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND LATCH BOLT 3 LOCKING POINTS

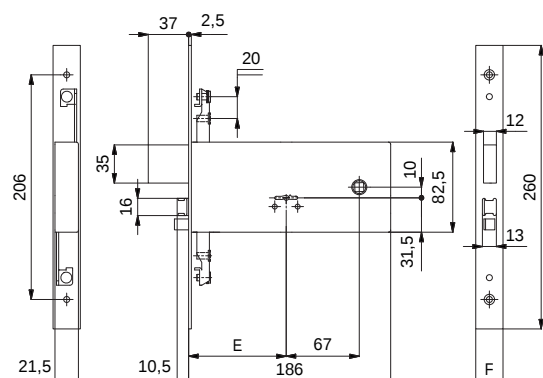

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated steel piston - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm - Coil set cod. 049 (12V-10W a.c.) CE.

WORKING:

Key driven dead bolt - Key, handle or remote control driven latch bolt - Working is assured also without electricity.

HAND:


Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws	 kg		
5968	90	25	5100/06	4	1,41	1	5
5968/F22	90	22	5100/06	4	1,39	1	5
5968/1	Long keys		5101/06	-	+ 0,01	-	-

DEAD AND LATCH BOLT

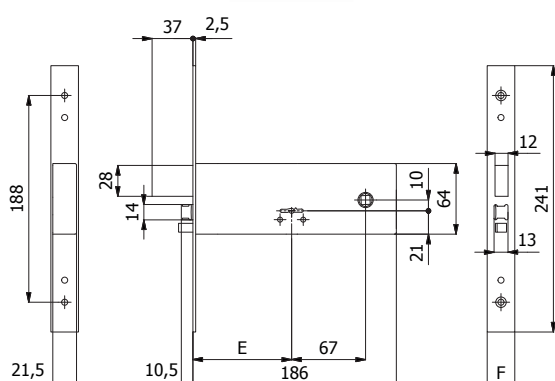

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated steel piston - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm - Coil set cod. 049 (12V-10W a.c.) CE.

WORKING:

Key driven dead bolt - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:


With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:

Reversible.


PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5948	90	25	5100/06	4	1,13	1	5
5948/F22	90	22	5100/06	4	1,11	1	5
5948/1	Long keys		5101/06	-	+ 0,01	-	-



DEAD AND LATCH BOLT 3 LOCKING POINTS

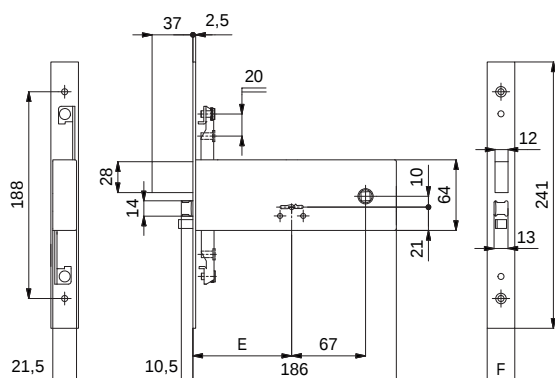

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated steel dead bolt - Nickel-plated steel piston - Nickel-plated special alloy latch bolt - Burnished steel square spindle device $\varnothing$ 8 mm - Coil set cod. 049 (12V-10W a.c.) CE.

WORKING:

Key driven dead bolt - Key, handle, remote control or push-button cod. 058 driven latch bolt - Working is assured also without electricity.

HOLD OPEN DEVICE:

With push-button cod. 059, it is possible to block the electric lock in its "open" position.

HAND:

Reversible.

PROVIDED WITH:

3 keys, escutcheons cod. 0590 N, 2 forend spacers cod. 0624 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

COD.	E	F		Throws			
5978	90	25	5100/06	4	1,21	1	5
5978/F22	90	22	5100/06	4	1,19	1	5
5978/1	Long keys		5101/06	-	+ 0,01	-	-