

pag. 484
Certifications

pag. 485
Panic exit devices

pag. 490
Outside accessories

pag. 492
Accessories for
panic exit devices

pag. 494
Schemes for doors



DESIGNED AND CERTIFIED ACCORDING TO EUROPEAN STANDARD

UNI EN 1125:2008 - ICIM 0040CS									
3	7	7	A	1	4	2	2	A	A
									



CATEGORY OF USE

3 = high frequency of use where there is little incentive to exercise care; i.e. where there is a chance of an accident occurring and of misuse



CORROSION RESISTANCE

4 = very high resistance (240 h)



DURABILITY

7= 200.000 test cycles
ICIM Classification = 500.000 test cycles



SECURITY

2 = security requirements are secondary to those of safety



DOOR MASS

7= Over 200 Kg
ICIM Classification = 300 Kg



PROJECTION OF HORIZONTAL BAR

2 = up to 100 mm (standard)



SUITABILITY FOR USE ON FIRE/SMOKE DOORS

A = suitable for use on smoke doors



TYPE OF HORIZONTAL BAR OPERATION

A = push bar



SAFETY

1 = top grade: all panic exit devices have a critical safety function




FIELD OF DOOR APPLICATION

A = single door, double door: active or inactive

VISIT OUR CERTIFICATION
WEB PAGE



THREE LOCKING POINTS (MODULAR)

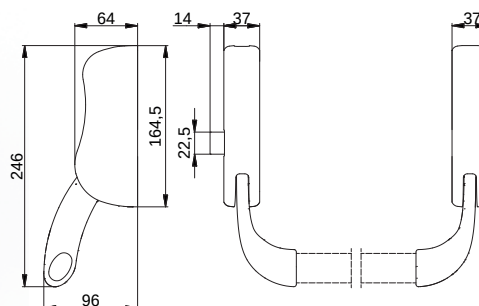

CONSTRUCTIVE FEATURES:

Zinc-plated steel cases - Painted aluminium covers - Painted special alloy levers - Chromed special alloy latch bolt - Stainless steel springs.

WORKING:

Horizontal bar or outside accessories driven latch bolt.


PROVIDED WITH:

Side striker, nylon plugs, fixing screws, assembling instructions, templates for drilling.

COD.	Hand	Finishing		kg		
6213	Reversible	Black	RAL 9005		2,18	1 10
6213/B	Reversible	White	RAL 9010		2,18	1 10
6213/B16	Reversible	White	RAL 9016		2,18	1 10
6213/G	Reversible	Grey	RAL 7040		2,18	1 10
6213/X	Reversible	Satinized stainless steel	-		2,18	1 10
6213 DX	Right	Black	RAL 9005		1,95	1 10
6213/B DX	Right	White	RAL 9010		1,95	1 10
6213/B16 DX	Right	White	RAL 9016		1,95	1 10
6213/G DX	Right	Grey	RAL 7040		1,95	1 10
6213/X DX	Right	Satinized stainless steel	-		1,95	1 10
6213 SX	Left	Black	RAL 9005		1,95	1 10
6213/B SX	Left	White	RAL 9010		1,95	1 10
6213/B16 SX	Left	White	RAL 9016		1,95	1 10
6213/G SX	Left	Grey	RAL 7040		1,95	1 10
6213/X SX	Left	Satinized stainless steel	-		1,95	1 10



HORIZONTAL BARS

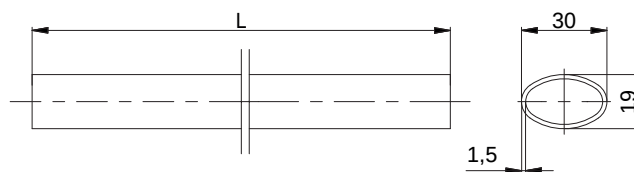**MATERIAL:**

Painted steel.

PROVIDED WITH:

Nylon plugs.

COD.	L	Finishing			kg		
6005 AB	1130	White	RAL 9010		1,06	10	-
6005 AB16	1130	White	RAL 9016		1,06	10	-
6005 AG	1130	Grey	RAL 7040		1,06	10	-
6005 AN	1130	Black	RAL 9005		1,06	10	-
6005 AR	1130	Red	RAL 3020		1,06	10	-
6005 AV	1130	Green	RAL 6024		1,06	10	-
6006 AB	1480	White	RAL 9010		1,32	10	-
6006 AB16	1480	White	RAL 9016		1,32	10	-
6006 AG	1480	Grey	RAL 7040		1,32	10	-
6006 AN	1480	Black	RAL 9005		1,32	10	-
6006 AR	1480	Red	RAL 3020		1,32	10	-
6006 AV	1480	Green	RAL 6024		1,32	10	-

End of line

MATERIAL:

Stainless steel.


PROVIDED WITH:

Nylon plugs.

COD.	L	Finishing			kg		
6005 X	1130	Satinized			1,20	10	-
6006 X	1330	Satinized			1,50	10	-

End of line

HORIZONTAL BARS

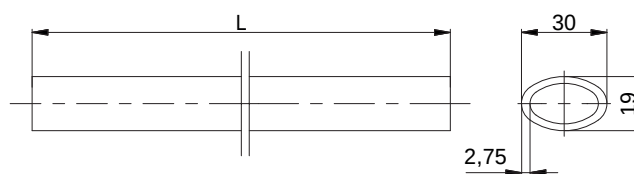**MATERIAL:**

Painted aluminium.


PROVIDED WITH:

Nylon plugs.

COD.	L	Finishing			kg		
6007 LB	1130	White	RAL 9010		0,68	10	-
6007 LB16	1130	White	RAL 9016		0,68	10	-
6007 LG	1130	Grey	RAL 7040		0,68	10	-
6007 LN	1130	Black	RAL 9005		0,68	10	-
6007 LR	1130	Red	RAL 3020		0,68	10	-
6007 LV	1130	Green	RAL 6024		0,68	10	-
6008 LB	1480	White	RAL 9010		0,81	10	-
6008 LB16	1480	White	RAL 9016		0,81	10	-
6008 LG	1480	Grey	RAL 7040		0,81	10	-
6008 LN	1480	Black	RAL 9005		0,81	10	-
6008 LR	1480	Red	RAL 3020		0,81	10	-
6008 LV	1480	Green	RAL 6024		0,81	10	-



TOP AND BOTTOM BOLTS KIT

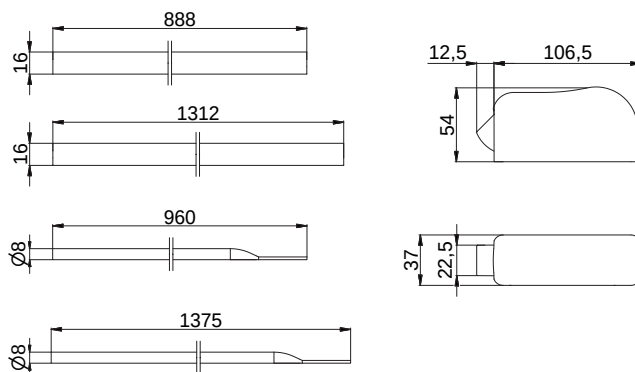

CONSTRUCTIVE FEATURES:

Zinc-plated steel cases - Painted aluminium covers - Chromed special alloy latch bolts - Stainless steel springs - Zinc-plated steel rods - Painted aluminium cover rod.

APPLICATION:


Three locking points panic exit devices.

PROVIDED WITH:

Side striker, floor striker, fixing screws and fixing accessories.

COD.	Finishing			kg		
6040	Black	RAL 9005		2,22	1	-
6040/B	White	RAL 9010		2,22	1	-
6040/B16	White	RAL 9016		2,22	1	-
6040/G	Grey	RAL 7040		2,22	1	-
6040/X	Satined stainless steel			2,22	1	-

SIDE LATCHES KIT

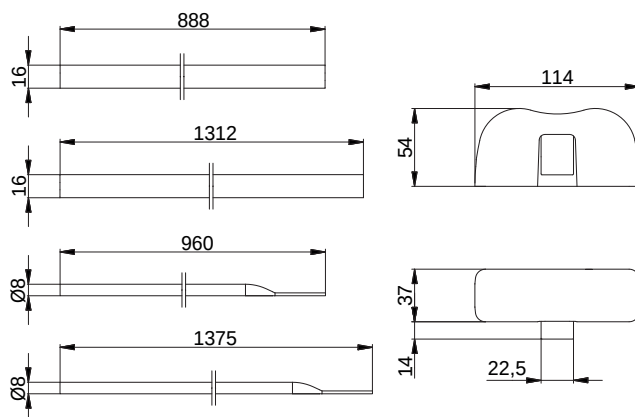

CONSTRUCTIVE FEATURES:

Zinc-plated steel cases - Painted aluminium covers - Chromed special alloy latch bolts - Stainless steel springs - Zinc-plated steel rods - Painted aluminium cover rod.

APPLICATION:

Three locking points panic exit devices.

PROVIDED WITH:

2 side strikers, fixing screws and fixing accessories.

COD.	Finishing			kg		
6041	Black	RAL 9005		2,21	1	-
6041/B	White	RAL 9010		2,21	1	-
6041/B16	White	RAL 9016		2,21	1	-
6041/G	Grey	RAL 7040		2,21	1	-
6041/X	Satined stainless steel			2,21	1	-



OUTSIDE PLATE WITH HANDLE AND CYLINDER



CONSTRUCTIVE FEATURES:


Painted special alloy case and handle - Zinc and plastic plated steel cover - Nickel-plated brass cylinder.

WORKING:

Door opened by the handle - Handle interlock is controlled by the key (blocked handle).

PROVIDED WITH:

Cylinder cod.121.30.10, 3 keys, fixing screws, assembling instructions, template for drilling.

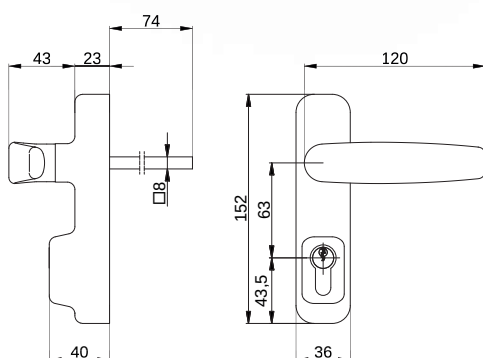

COD.			Finishing			
6011	121.30.10	105/05	Black RAL 9005		1,00	1 -
6011/B	121.30.10	105/05	White RAL 9010		1,00	1 -
6011/B16	121.30.10	105/05	White RAL 9016		1,00	1 -
6011/G	121.30.10	105/05	Grey RAL 7040		1,00	1 -
6011/X	121.30.10	105/05	Satined stainless steel		1,00	1 -

OUTSIDE PLATE WITH FREE HANDLE AND CYLINDER



CONSTRUCTIVE FEATURES:


Painted special alloy case and handle - Zinc and plastic plated steel cover - Nickel-plated brass cylinder.

WORKING:

Door opened by the handle - Handle interlock is controlled by the key (free handle).

PROVIDED WITH:

Cylinder cod.121.30.10, 3 keys, fixing screws, assembling instructions, template for drilling.

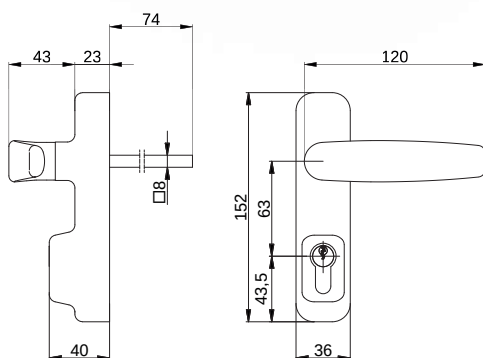

COD.			Finishing			
6012	121.30.10	105/05	Black RAL 9005		0,99	1 -
6012/B	121.30.10	105/05	White RAL 9010		0,99	1 -
6012/B16	121.30.10	105/05	White RAL 9016		0,99	1 -
6012/G	121.30.10	105/05	Grey RAL 7040		0,99	1 -
6012/X	121.30.10	105/05	Satined stainless steel		0,99	1 -

OUTSIDE PLATE WITH HANDLE AND FLAT KEY CYLINDER

**CONSTRUCTIVE FEATURES:**


Painted special alloy case and handle - Zinc and plastic plated steel cover - Nickel-plated brass cylinder.


WORKING:

Door opened by the handle - Handle interlock is controlled by the key (blocked handle).

PROVIDED WITH:

Cylinder cod.221.30.10, 3 keys, fixing screws, assembling instructions, template for drilling.

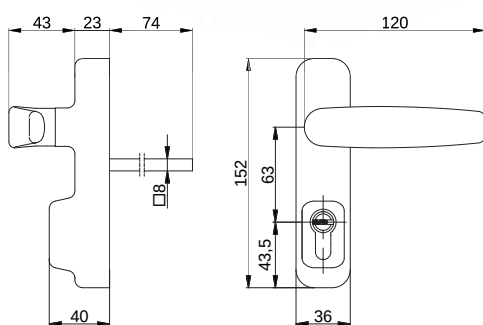

COD.			Finishing			
6013	221.30.10	2020/06	Black RAL 9005		1,02	1 -
6013/B	221.30.10	2020/06	White RAL 9010		1,02	1 -
6013/B16	221.30.10	2020/06	White RAL 9016		1,02	1 -
6013/G	221.30.10	2020/06	Grey RAL 7040		1,02	1 -
6013/X	221.30.10	2020/06	Satined stainless steel		1,02	1 -

OUTSIDE PLATE WITH FREE HANDLE AND FLAT KEY CYLINDER

**CONSTRUCTIVE FEATURES:**


Painted special alloy case and handle - Zinc and plastic plated steel cover - Nickel-plated brass cylinder.


WORKING:

Door opened by the handle - Handle interlock is controlled by the key (free handle).


PROVIDED WITH:

Cylinder cod.221.30.10, 3 keys, fixing screws, assembling instructions, template for drilling.

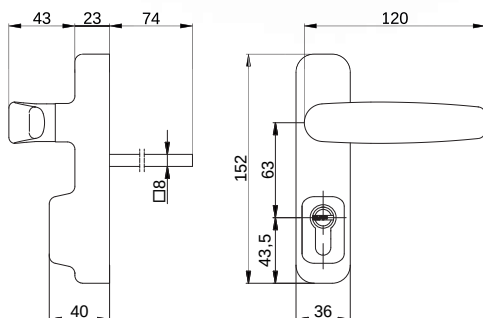

COD.			Finishing			
6014	221.30.10	2020/06	Black RAL 9005		1,01	1 -
6014/B	221.30.10	2020/06	White RAL 9010		1,01	1 -
6014/B16	221.30.10	2020/06	White RAL 9016		1,01	1 -
6014/G	221.30.10	2020/06	Grey RAL 7040		1,01	1 -
6014/X	221.30.10	2020/06	Satined stainless steel		1,01	1 -

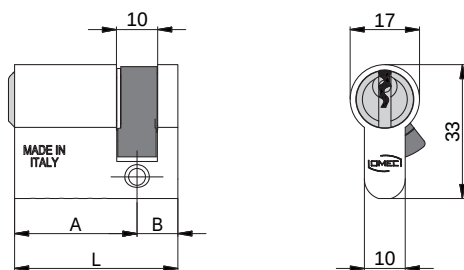

HALF CYLINDER Standard key
**CONSTRUCTIVE FEATURES:**

High resistance aluminium body - Easy entrance key nickel-plated brass plug - Stainless steel pins and drivers - Stainless steel springs - Steel off center 30° DIN cam - Nickel-plated brass keys.

WORKING:

Turn the key 360°.

PROVIDED WITH:


3 keys.

ON REQUEST:

Special keying systems KA-MK-GMK-CL.

COD.	L	A	B					
121.30.10*	40	30	10	5	105/05	0,10	1	10
121.60.10	70	60	10	5	105/05	0,14	1	10
121.70.10	80	70	10	5	105/05	0,14	1	10
121.87.10	97	87	10	5	105/05	0,17	1	5
121.97.10	107	97	10	5	105/05	0,18	1	5

*For outside plates cod. 6011 - 6012

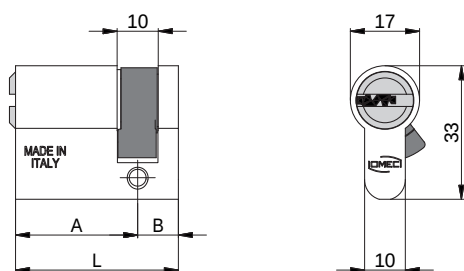HALF CYLINDER Standard key
**CONSTRUCTIVE FEATURES:**

High resistance aluminium body - Easy entrance key nickel-plated brass plug - Stainless steel pins and drivers - Stainless steel springs - Steel off center 30° DIN cam - Silver nickel reversible flat keys with code number.

WORKING:

Turn the key 360°.

PROVIDED WITH:

3 keys.

ON REQUEST:


Special keying systems KA-MK-GMK-CL.

COD.	L	A	B					
221.30.10*	40	30	10	6	2020/06	0,11	1	10
221.60.10	70	60	10	6	2020/06	0,18	1	10
221.70.10	80	70	10	6	2020/06	0,20	1	10
221.80.10	90	80	10	6	2020/06	0,22	1	5

*For outside plates cod. 6013 - 6014


ACCESSORIES FOR PANIC EXIT DEVICES

LONG ROD FOR LOCKING KIT

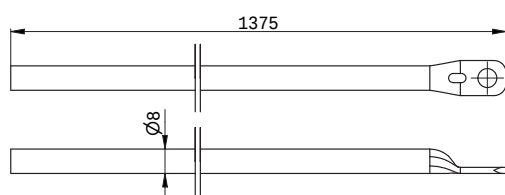


COD.	Material			
AST006.0	Zinc-plated steel	0,231	10	-

SIDE STRIKER

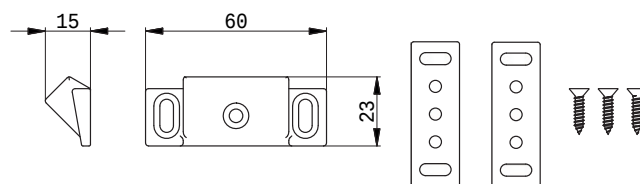


COD.	Material			
ANY118.0	Chromed special alloy	0,085	10	-

LONG COVER ROD




COD.	Material				
AST016.0	Black alluminium	RAL 9005	0,224	10	-
AST022.0	White alluminium	RAL 9010	0,224	10	-
AST025.0	Grey alluminium	RAL 7040	0,224	10	-
AST052.0	Satinized alluminium	-	0,224	10	-
AST055.0	White alluminium	RAL 9016	0,224	10	-

FLOOR STRIKER

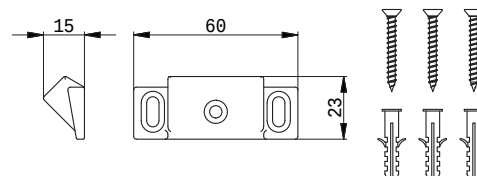

COD.	Material			
ANY120.0	Chromed special alloy	0,055	10	-

PROLONGATION KIT FOR DEVIATORS

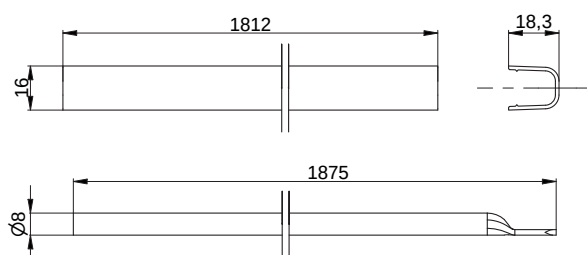


For doors high up to 3000 mm.


COD.	Material				
6032	Black	RAL 9005	0,650	5	-
6032/B	White	RAL 9010	0,650	5	-
6032/B16	White	RAL 9016	0,650	5	-
6032/G	Grey	RAL 7040	0,650	5	-
6032/X	Satinized stainless steel	-	0,650	5	-



ONE LOCKING POINT

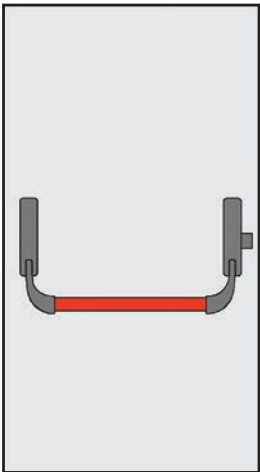


6213
6213 DX

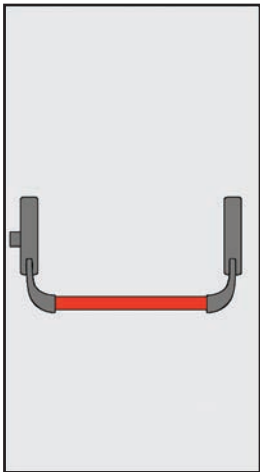


6213
6213 SX


TWO LOCKING POINTS

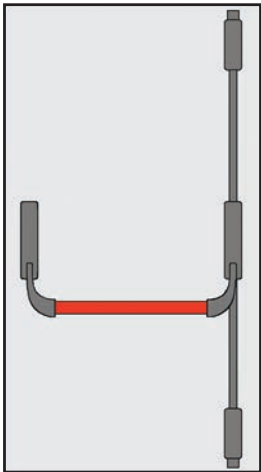


6213 + 6040
6213 DX + 6040

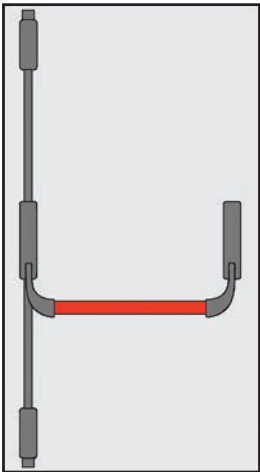

6213 + 6040
6213 SX + 6040

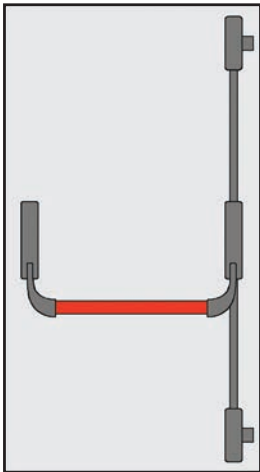


6213 + 6041
6213 DX + 6041

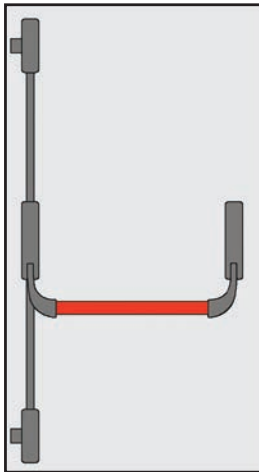


6213 + 6041
6213 SX + 6041


THREE LOCKING POINTS

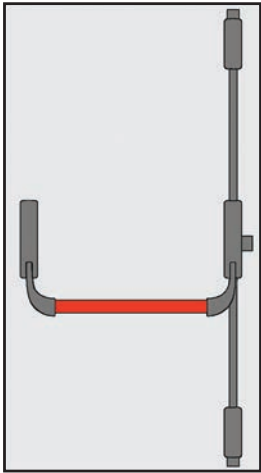


6213 + 6040
6213 DX + 6040

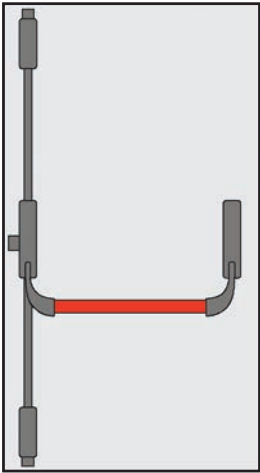


6213 + 6040
6213 SX + 6040

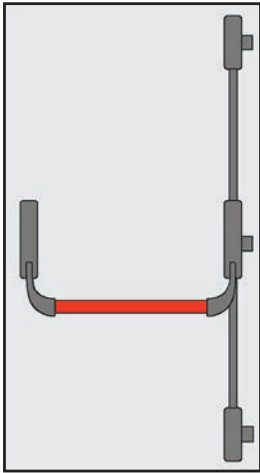


6213 + 6041
6213 DX + 6041

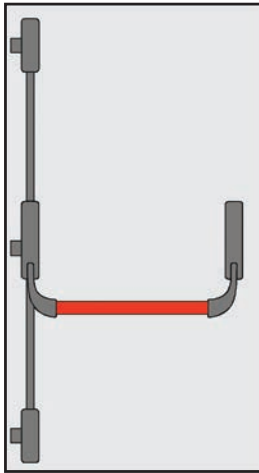

6213 + 6041
6213 SX + 6041

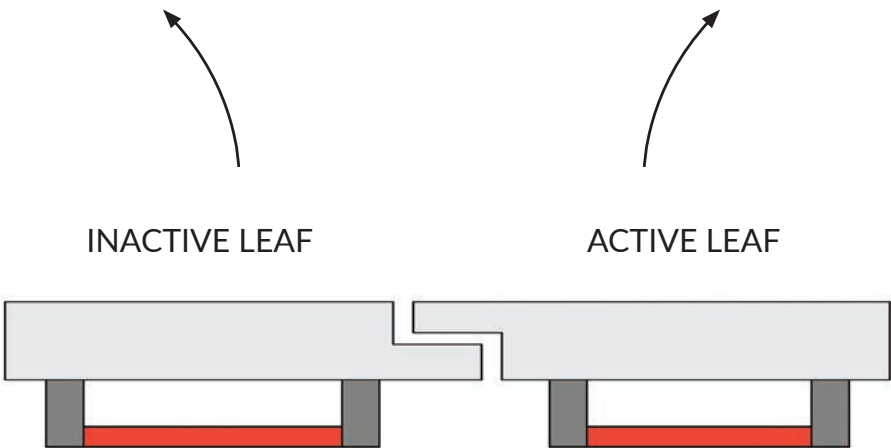


THREE LOCKING POINTS

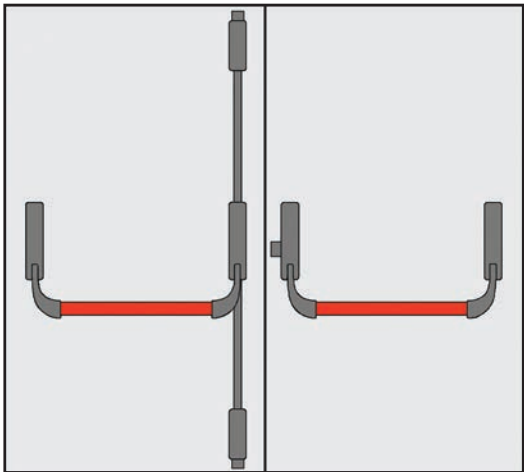

6213 + 6040
6213 DX + 6040

6213
6213 SX


FOUR LOCKING POINTS

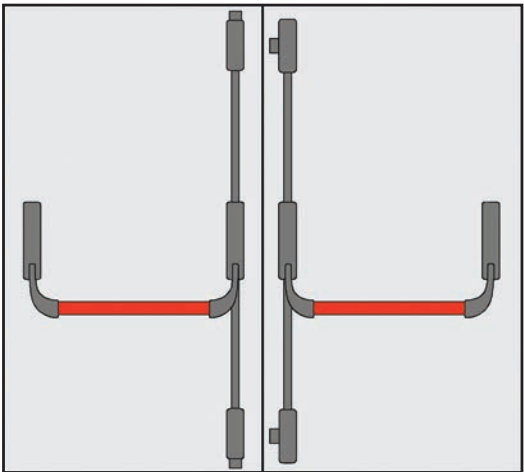

6213 + 6040
6213 DX + 6040


6213 + 6041
6213 SX + 6041

FIVE LOCKING POINTS

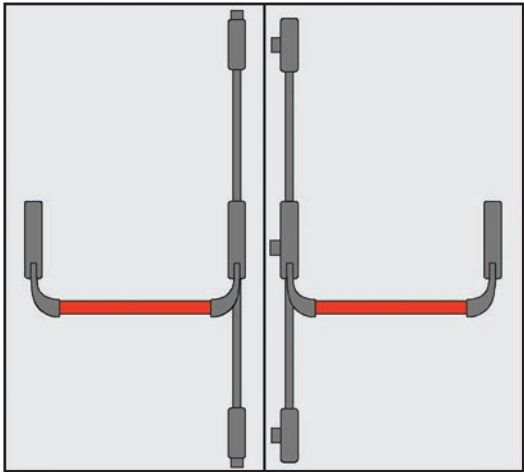

6213 + 6040
6213 DX + 6040

6213 + 6041
6213 SX + 6041

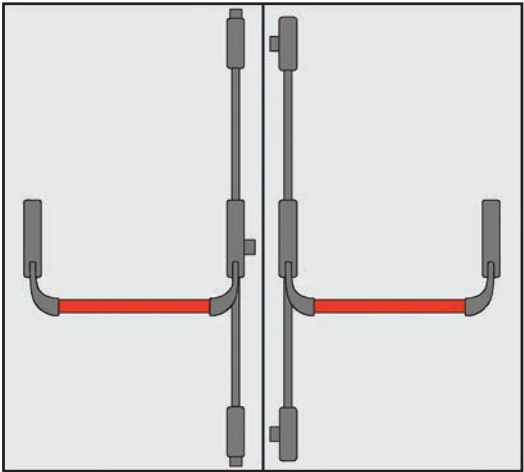

6213 + 6040
6213 DX + 6040

6213 + 6041
6213 SX + 6041

